

DynaTemp[®]

DYNAmic Performance!

- Low water consumption - only 0.69 gallons per rack
- Sloped hood design moves heat and steam away from the operator
- Self-diagnosing digital controls diagnose most common issues and indicate what the issue is if something happens that affects the operation of the dishmachine
- Three selectable timed cycles for warewashing flexibility and performance
- DynaTemp only requires 10 PSI at the rinse arm for proper operation
- Chemical and water connections are conveniently located on the side of the machine
- Triple wash arm for consistent and reliable performance
- Built-in booster heater with exclusive Sani-Sure™ technology ensures proper rinse temperature



Jackson[®]
Warewashing Systems



0.69



57



DynaTemp®

Cleanability

Our new triple wash arm is engineered to focus more water on the dishes for superior cleaning performance.

Operation

Easy to read digital controls, a full wrap tubular handle, and a door activated drain closure make operation of the DynaTemp a breeze. When the door is opened, our sloped hood design moves the steam and heat to the rear of the unit and away from the operator.

Serviceability

Ease of serviceability is important to Jackson, and with that in mind the DynaTemp was designed to utilize common Jackson parts, as well as making service access easy. All service parts can be accessed while the unit is in place – no need to pull it from the wall or disconnect tables.




Digital LED Control Panel



Triple Wash Arm



Interchangeable Scrap Baskets

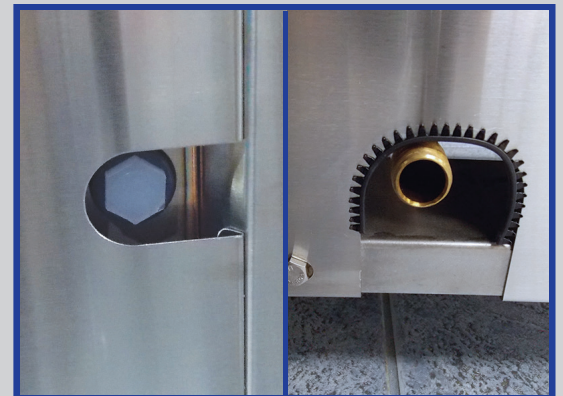

Conveniently Located Connections

OPERATING CAPACITY

| OPERATING CYCLE | CYCLE TIME | RACKS PER HOUR | GALLONS PER HOUR |
|-----------------|------------|----------------|------------------|
| Normal | 58 sec | 57 | 39.5 |
| Heavy | 108 sec | 32 | 22.2 |
| Extra Heavy | 238 sec | 15 | 10.4 |