



*Warewashing Systems*

# INSTALLATION, OPERATION, AND SERVICE MANUAL



# NXP-HTD<sup>®</sup>

**NXP-HTD<sup>®</sup> DOOR-TYPE DISHMACHINE**

NXP-HTD Manual • 07610-004-91-86-D

**MANUFACTURER'S LIMITED WARRANTY  
(APPLICABLE ONLY IN THE UNITED STATES AND CANADA)**

**WARRANTY REGISTRATION:**

To register your Jackson Dishmachine's warranty go to [www.jacksonwws-warranty.com](http://www.jacksonwws-warranty.com) or call 1-888-800-5672. Failure to register the Dishmachine will void the warranty.

**ONE YEAR LIMITED PARTS AND LABOR WARRANTY**

For a period of one (1) year from date of original installation of a new Jackson Dishmachine (but in no event to exceed eighteen (18) months from date of shipment from Jackson's factory), Jackson WWS, Inc. (Jackson) will repair or replace, at its discretion, any original part that proves defective in materials or workmanship at the time the Dishmachine was purchased; provided that (i) the Dishmachine has not been altered, (ii) the Dishmachine has been properly installed, maintained, and operated under normal use conditions and in accordance with the applicable installation, operation and service manual available on the Jackson website, and (iii) a warranty claim is reported to a Jackson Authorized Service Agency within the warranty period. This warranty includes replacement with Jackson specified genuine replacement parts, purchased directly from a Jackson Authorized Parts Distributor or Service Agency. Use of generic replacement parts may create a hazard and shall void this warranty.

**THIS WARRANTY DOES NOT APPLY OUTSIDE THE UNITED STATES AND CANADA.**

Jackson will pay the labor to repair or replace a defective original part as a part of the warranty, provided that a Jackson Authorized Service Agency performs the labor. Any repair or replacement work by anyone other than a Jackson Authorized Service Agency is the sole responsibility of the purchaser. Labor coverage is limited to regular hourly rates; Jackson will not pay overtime premiums or emergency service charges.

Accessory components (such as table limit switches, pressure regulators, and drain water tempering kits) that are not installed by Jackson at the factory and are shipped with the Dishmachine carry only a (1) one-year parts warranty. Labor to repair or replace these components is not included in the warranty or covered by Jackson. Booster heaters not manufactured by Jackson are not covered by this warranty but are warranted by their respective manufacturers.

This warranty is void if any defect or failure is a direct result from shipping, handling, fire, water, accident, alteration, modification, misuse, abuse, flood, acts of God, burglary, casualty, attempted repair by unauthorized persons, use of replacement parts not authorized by Jackson, improper installation, installation not in accordance with local electrical and plumbing codes, if the serial number has been removed or altered, if the Dishmachine is used for any purpose other than originally intended, or if the equipment is installed for residential use.

Jackson does not authorize any other entity or person, including, without limitation, any entity or person who deals in Jackson Dishmachines, to change this warranty or create any other obligation in connection with Jackson Dishmachines.

**TRAVEL LIMITATIONS:**

Jackson limits warranty travel time to the customer site within 50 miles of the Jackson authorized service agent's office and during regular business hours. Jackson will not pay for travel time and mileage that exceeds these limits, or any fees such as those for air or boat travel without prior authorization.

**REPLACEMENT PARTS WARRANTY:**

For a period of (90) ninety days from the date of installation by a Jackson Authorized Service Agency (but in no event to exceed (180) one-hundred-eighty days from the date of purchase from a Jackson Authorized Parts Distributor or Service Agency), Jackson will repair or replace, at its discretion, any Jackson genuine replacement parts that prove defective in materials or workmanship at the time the replacement parts were installed. This warranty does not include paying the labor to repair or replace the replacement part. This warranty is subject to all conditions, exclusions and limitations applicable to the Dishmachine.

**MANUFACTURER'S LIMITED WARRANTY (CONT.)  
(APPLICABLE ONLY IN THE UNITED STATES AND CANADA)**

**PRODUCT CHANGES:**

Jackson reserves the right to make changes in design and specification of any component of the Dishmachine as engineering or necessity requires.

**DISCLAIMER OF WARRANTIES:**

**THERE ARE NO WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY, THAT ARE NOT SET FORTH HEREIN, OR THAT EXTEND BEYOND THE DURATION HEREOF.**

**LIMITATION OF REMEDIES AND LIABILITIES:**

**YOUR SOLE AND EXCLUSIVE REMEDY UNDER THIS LIMITED WARRANTY SHALL BE PRODUCT REPAIR OR REPLACEMENT AS PROVIDED HEREIN.**

**UNDER NO CIRCUMSTANCES WILL JACKSON BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES, OR FOR DAMAGES IN THE NATURE OF PENALTIES. JACKSON'S LIABILITY ON ANY CLAIM OF ANY KIND WITH RESPECT TO THE GOODS OR SERVICES COVERED HEREUNDER SHALL IN NO CASE EXCEED THE PRICE OF THE GOODS OR SERVICES OR PART THEREOF WHICH GIVES RISE TO THE CLAIM.**

**ITEMS NOT COVERED:**

THIS WARRANTY DOES NOT COVER (1) ADJUSTMENTS INCLUDING, BUT NOT LIMITED TO, TIMER CAMS, THERMOSTATS, DOORS, TANK HEATER ADJUSTMENTS OR CLUTCHES; (2) AIR FREIGHT OR OVERNIGHT FREIGHT; (3) ANY AMOUNT EXCEEDING ORIGINAL PURCHASE PRICE; (4) CLEANING OF DRAIN VALVES, GAS LINES, RINSE/WASH NOZZLES, STRAINERS, SCREENS, OR SPRAY PIPES; (5) CLEANING OR DELIMING OF THE DISHMACHINE OR ANY COMPONENT INCLUDING, BUT NOT LIMITED TO, WASH ARMS, RINSE ARMS AND STRAINERS; (6) CONDITIONS CAUSED BY THE USE OF INCORRECT (NON-COMMERCIAL) GRADE DETERGENTS; (7) CORROSION FROM CHEMICALS DISPENSED IN EXCESS OF RECOMMENDED CONCENTRATIONS; (8) COSMETIC DAMAGE, INCLUDING BUT NOT LIMITED TO, SCRATCHES, DENTS, CHIPS, AND OTHER DAMAGE TO THE DISHMACHINE FINISHES, UNLESS SUCH DAMAGE RESULTS FROM DEFECTS IN MATERIALS AND WORKMANSHIP AND IS REPORTED TO JACKSON WITHIN (30) THIRTY DAYS FROM THE DATE OF INSTALLATION; (9) DAMAGE CAUSED BY LABOR DISPUTE; (10) DAMAGES RESULTING FROM IMPROPER CONNECTION TO UTILITY SERVICE; (11) DAMAGES RESULTING FROM WATER CONDITIONS, INADEQUATE OR EXCESSIVE WATER PRESSURE, ACCIDENTS, ALTERATIONS, IMPROPER USE, ABUSE, HANDLING, OVERLOADS, TAMPERING, IMPROPER INSTALLATION OR FAILURE TO FOLLOW MAINTENANCE AND OPERATING PROCEDURES; (12) DISCOLORATION, RUST OR OXIDATION OF SURFACES RESULTING FROM CAUSTIC OR CORROSIVE ENVIRONMENTS, INCLUDING, BUT NOT LIMITED TO, HIGH SALT CONCENTRATIONS, HIGH MOISTURE OR HUMIDITY, OR EXPOSURE TO CHEMICALS; (13) ELECTRIC BOOSTERS, FEED LINES, FLEX HOSE, FUSES, GARBAGE DISPOSALS, OR GAS PILOTS; (14) EXCESSIVE LIME, MINERAL, OR ALKALINE BUILDUP; (15) EXPENSES DUE TO DISCONNECTION, DELIVERY, RETURN AND REINSTALLATION; (16) FAILURE OF ELECTRICAL COMPONENTS DUE TO CONNECTION OF CHEMICAL DISPENSING EQUIPMENT INSTALLED BY OTHERS; (17) FAILURE OF FACILITY WATER HEATER TO MAKE TEMPERATURE; (18) FAILURE TO MAINTAIN WATER HARDNESS LOWER THAN 3.0 GRAINS, PH BETWEEN 7.0 AND 8.5 AND TOTAL DISSOLVED SOLIDS BELOW 250 PPM; (19) FAILURE TO COMPLY WITH LOCAL ELECTRICAL BUILDING CODES; (20) LEAKS OR DAMAGE RESULTING FROM SUCH LEAKS CAUSED BY THE INSTALLER, INCLUDING THOSE AT MACHINE TABLE CONNECTIONS, OR BY CONNECTION OF CHEMICAL DISPENSING EQUIPMENT INSTALLED BY OTHERS; (21) OPENING OR CLOSING OF UTILITY SUPPLY VALVES OR SWITCHING OF ELECTRICAL SUPPLY CURRENT; (22) PERFORMANCE OF REGULAR MAINTENANCE AND CLEANING AS OUTLINED IN THE OPERATOR'S GUIDE; (23) REMOVAL OR REINSTALLATION OF INACCESSIBLE DISHMACHINES OR BUILT-IN FIXTURES THAT INTERFERE WITH SERVICING, REMOVAL OR REPLACEMENT OF THE DISHMACHINE; (24) REPLACEMENT WEAR ITEMS INCLUDING, BUT NOT LIMITED TO, CURTAINS, DRAIN BALLS, DOOR GUIDES, GASKETS, O-RINGS, SEALS, SQUEEZE TUBES, AND BEARINGS; (25) RESIDENTIAL USE; (26) USE WITH UTILITY SERVICE OTHER THAN THAT DESIGNATED ON THE RATING PLATE.

## REVISION HISTORY

Revision	Date	Made by	Process	Details
A	10-9-20	JH	8794	Initial release of manual.
B	5-22-21	JH	N/A	Updated I/O Module P/N on pg. 24. Added Fault Codes section.
C	9-22-21	JH	N/A	Added Setpoints section.
D	5-26-22	JH	N/A	Added Power Button Connector Wiring page. Updated schematic.

**Jackson®**

## ***Warewashing Systems***

### **NXP-HTD®**

**Door-type dishmachine; ENERGY STAR® qualified,  
electric-heated, high-temp, hot-water sanitizing,  
with booster heater.**

The manufacturer provides technical support for all of the dishmachines detailed in this manual. We strongly recommend that you refer to this manual before making a call to our technical support staff. Please have this manual open when you call so that our staff can refer you, if necessary, to the proper page. Technical support is not available on holidays.

Contact technical support toll-free at 1-888-800-5672.

Technical support is available for service personnel only.

# TABLE OF CONTENTS

## GUIDES

Symbols.....	1
Abbreviations & Acronyms.....	1

## SPECIFICATIONS

Dimensions.....	2
Table Dimensions .....	3
Operating Parameters .....	4
Electrical Requirements .....	5

## INSTALLATION

Installation Instructions.....	6
<i>Inspection</i> .....	6
<i>Unpacking</i> .....	6
<i>Leveling</i> .....	6
<i>Plumbing</i> .....	6
<i>Water Supply Connection</i> .....	6
<i>Pressure Regulator</i> .....	7
<i>Shock Absorber</i> .....	7
<i>Connecting the Drain Line</i> .....	7
<i>Chemical &amp; Exhaust Fan Electrical Connections</i> .....	7
<i>Chemical Connections</i> .....	8
<i>Plumbing Check</i> .....	8
<i>Electrical Power Connections</i> .....	9
<i>Motor Rotation</i> .....	9
<i>Voltage Check</i> .....	10
<i>Surrounding Area</i> .....	10
<i>Temperature Setpoints</i> .....	10

## OPERATION

Operating Instructions .....	11
<i>Preparation</i> .....	11
<i>Power Up</i> .....	11
<i>Filling the Wash Tub</i> .....	11
<i>Ware Preparation</i> .....	11
<i>Daily Machine Preparation</i> .....	11
<i>Warm-Up Cycles</i> .....	12
<i>Washing a Rack of Ware</i> .....	12
<i>Operational Inspection</i> .....	12
<i>Shutdown &amp; Cleaning</i> .....	12

# TABLE OF CONTENTS

## OPERATION

Detergent Control .....	15
Delimiting .....	16

## MAINTENANCE

Preventative Maintenance .....	17
--------------------------------	----

## TROUBLESHOOTING

Setpoints .....	18
Fault Codes .....	20
Troubleshooting .....	23

## PARTS

Control Box.....	25
Electrical Box.....	27
Hood.....	29
Door & Arm.....	31
Tub .....	33
Frame .....	35
Rinse Tank.....	36
Motors .....	37
Heaters.....	39
Plumbing .....	40
Plumbing Options .....	42
Wash & Rinse Assemblies.....	43
460 V Machine Transformer Mounting Box .....	45
Kits .....	46

## SCHEMATICS

Power Button Connector Wiring .....	47
208/230/460 V, 50/60 Hz, 1-PH/3-PH.....	48

## SYMBOLS



- Risk of Injury to Personnel



- Risk of Damage to Equipment



- Risk of Electrical Shock



- Caustic Chemicals



- Reference Data Plate



- Lockout Electrical Power

**NOTICE**

- Important Note



- Instructions Hyperlink

## ABBREVIATIONS & ACRONYMS

**ANSI** - American National Standards Institute

**GHT** - Garden Hose Thread

**GPG** - Grains per Gallon

**GPM** - Gallons per Minute

**HP** - Horse Power

**Hz** - Hertz

**ID** - Inside Diameter

**kW** - Kilowatts

**MCA** - Minimum Circuit Ampacity

**MOP** - Maximum Overcurrent Protection

**NFPA** - National Fire Protection Association


**NPT** - National Pipe Thread

**OD** - Outside Diameter

**PRV** - Pressure Regulating Valve

**PSI** - Pounds per Square Inch



**V** - Volts

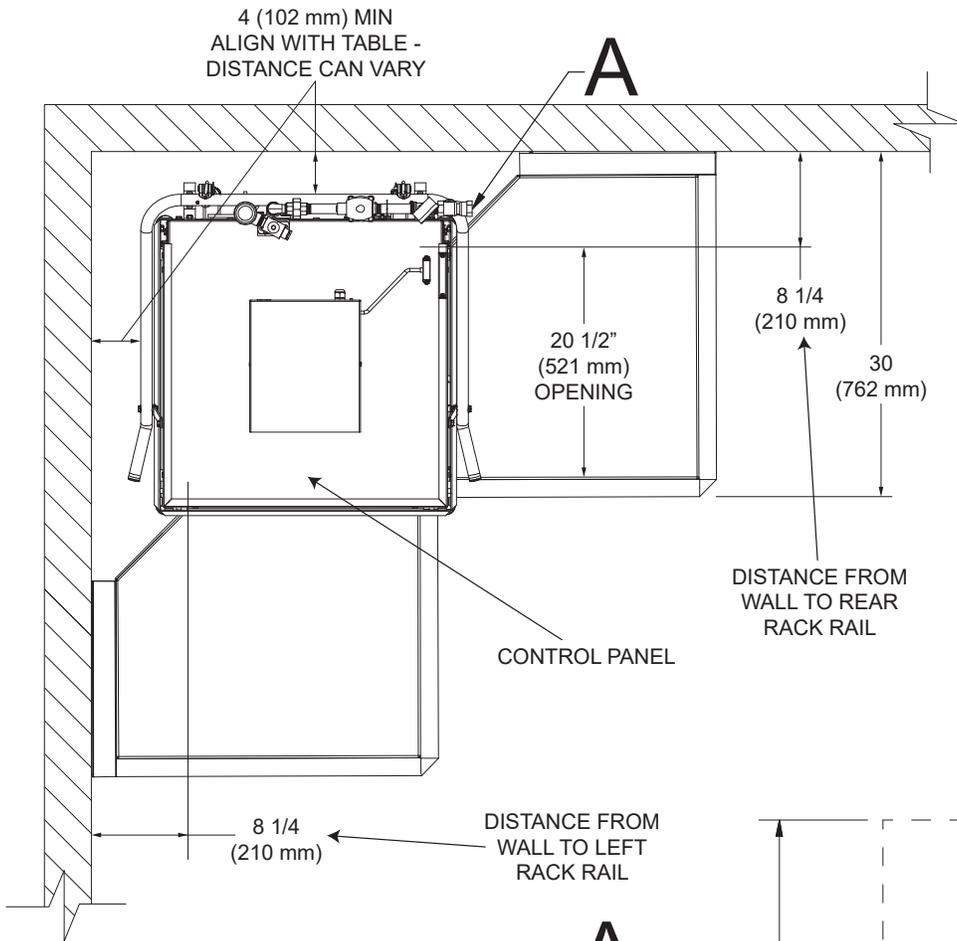


**LEGEND**

- A - Water Inlet (1/2" NPT)
- B - Electrical Connection Point
- C - Drain (1 1/2" NPT)


*All dimensions from the floor  
can be increased 1 1/8" using  
the machine's adjustable feet.*

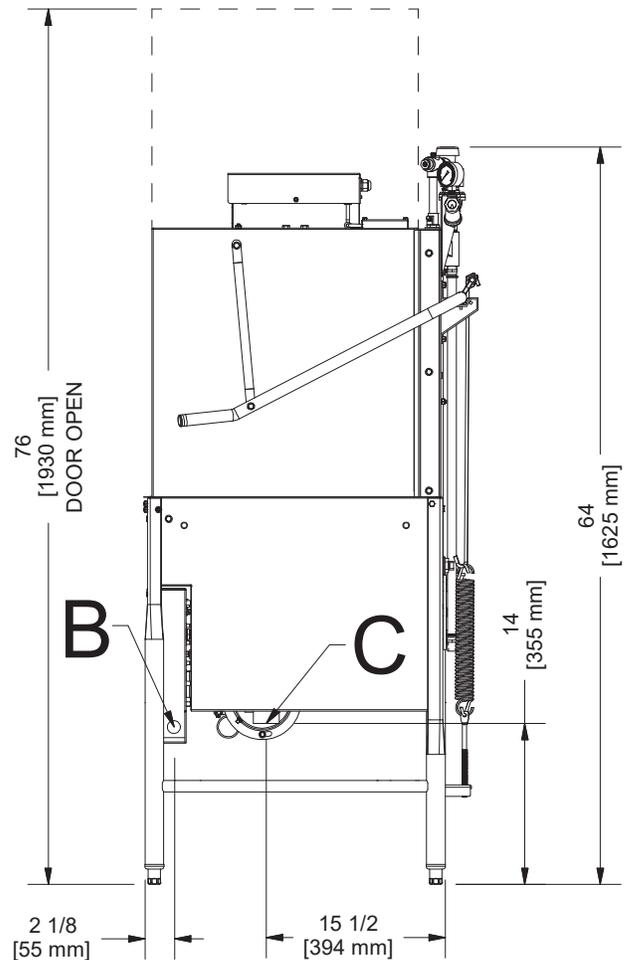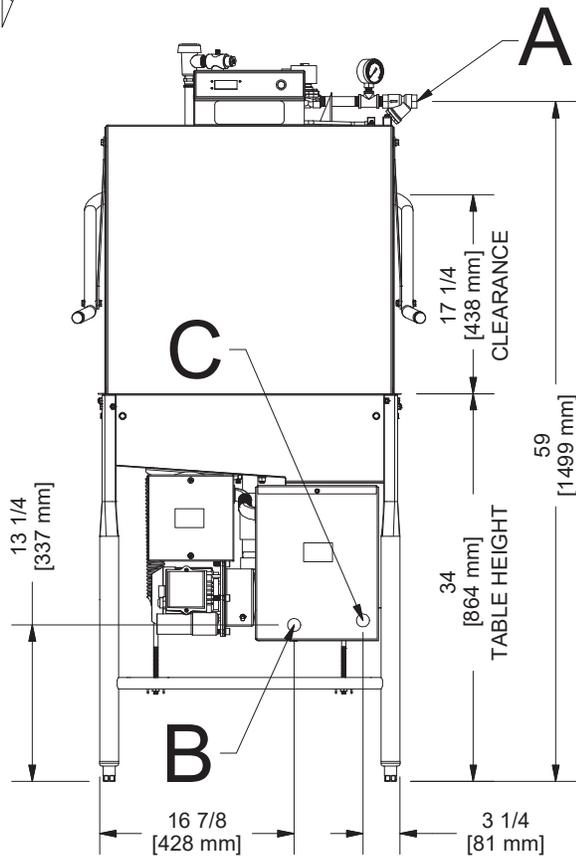

**CORNER INSTALLATION**

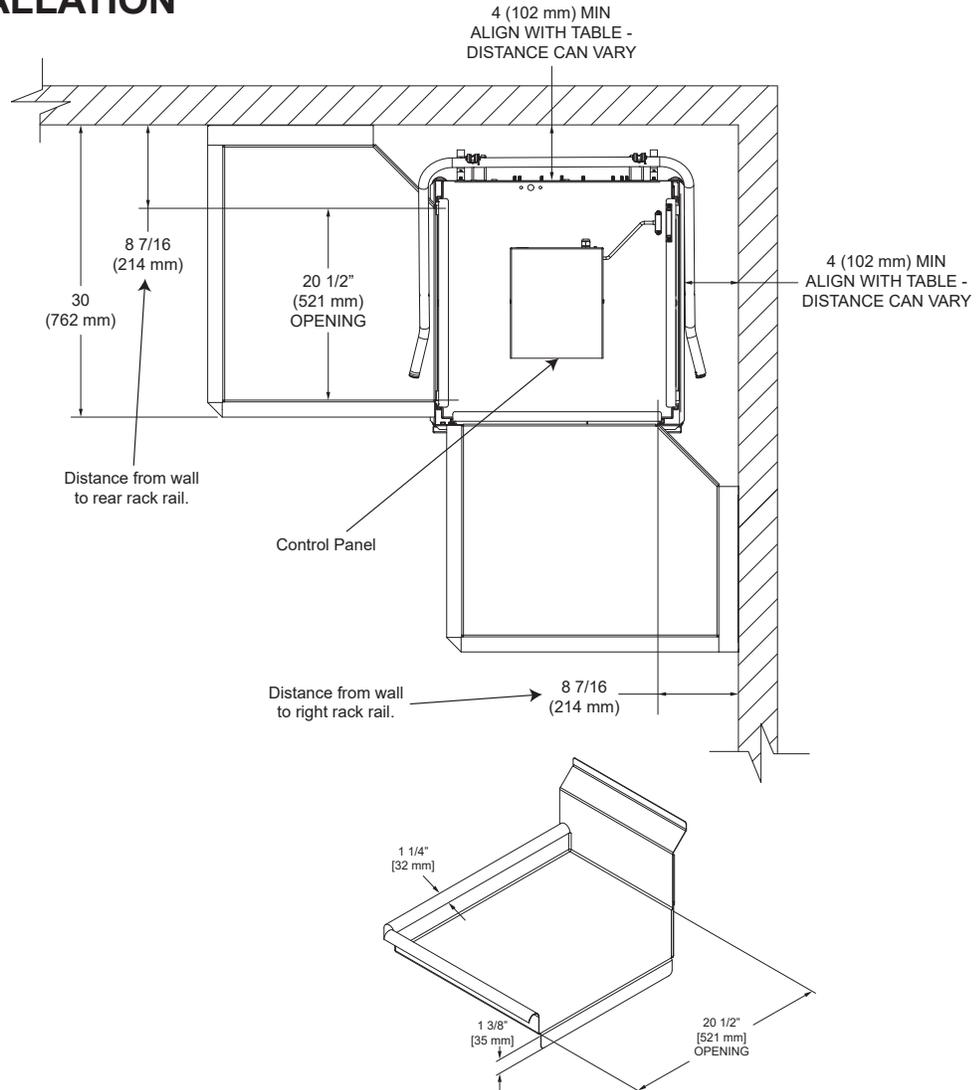

**STRAIGHT-THROUGH INSTALLATION**

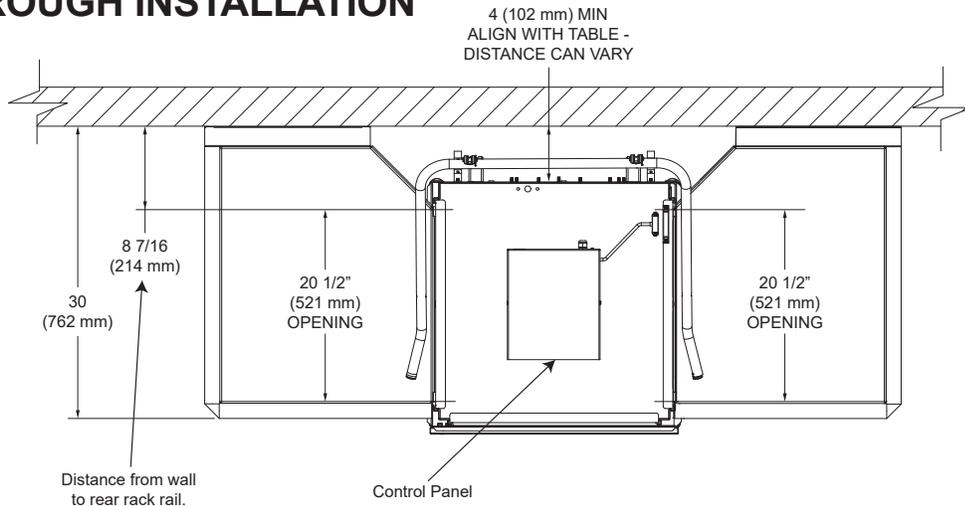

**PERFORMANCE/CAPABILITIES**

**Operating Capacity:**

Racks per Hour	58
Dishes per Hour	1450
Glasses per Hour	2088

**Minimum Operating Cycle (Seconds):**

Wash Time	40
Rinse Time	13
Dwell Time	4
Total Cycle Time	57

**Tank Capacity (Gallons/Liters):**

Wash Tank	8.0/30.3
Rinse Tank	2.0/7.6

**WATER REQUIREMENTS**

Minimum Wash Temperature (°F/°C)	150/66
Minimum Rinse Temperature (°F/°C)	180/83
Inlet Water Temperature (°F/°C)	110/44
Flow Pressure (PSI)	10 ± 2
Water Line Size	1/2"
Drain Line Size	1 1/2"

**NOTICE**



*Always refer to the machine data plate for specific electrical and water requirements. The material provided on this page is for reference only and is subject to change without notice.*

Local codes may require more stringent protection than what is displayed here and on the data plate. Always verify with your electrical service contractor that your circuit protection is adequate and meets all applicable national and local codes. Numbers in this manual are for reference and may change without notice.

**NOTICE**

On three-phase machines, imbalanced wild leg goes to L3.  
Also see the Motor Rotation section.



Volts	Phase	Freq	Wash Motor	Wash Heater	Rinse Heater	Total Load	MCA	MOP
208	1	60 Hz	5.0 A	19.7 A	50.6 A	75.3 A	76.6 A	80.0 A
230	1	60 Hz	5.0 A	21.8 A	55.9 A	82.7 A	84.0 A	90.0 A
208	3	60 Hz	5.0 A	11.4 A	29.2 A	45.6 A	46.9 A	50.0 A
230	3	60 Hz	5.0 A	12.6 A	32.3 A	49.9 A	51.2 A	55.0 A

## INSPECTION

*Do not throw away packaging if damage is evident!*

Before installing the machine, check the packaging and machine for damage. If the packaging is damaged, the machine might also be damaged. If there is damage to both packaging and machine, do not throw away the packaging. The machine has been inspected and packed at the factory and is expected to arrive to you in new, undamaged condition. However, rough handling by carriers or others might result in damage to the machine while in transit. If so, do not return the machine to the manufacturer. Instead, contact the carrier and ask them to send a representative to the site to inspect the damage and complete an inspection report. You must contact the carrier and the dealer that sold you the machine within 48 hours of receiving the machine.

## UNPACKING

While unpacking the machine, ensure there are no missing parts. If an item is missing, contact the manufacturer immediately.

## LEVELING

The machine must be level in its operating location to prevent damage to the machine during operation and to ensure the best results. The machine comes with four adjustable bullet feet, which can be turned using a pair of channel locks (or by hand if the machine can be raised safely). Ensure the machine is level from side-to-side and front-to-back before making any connections.

## PLUMBING

*Plumber MUST flush the incoming water line!*

Plumbing connections must comply with all applicable local, state, and national plumbing codes. The plumber is responsible for ensuring that the incoming water line is thoroughly flushed before connecting it to any component of the machine. It is very important to remove all foreign debris from the water line that might potentially get trapped in the valves or cause an obstruction. Any valves that are fouled as a result of foreign matter left in the water line—and any expenses resulting from this fouling—are not the responsibility of the manufacturer.

*A water hardness test MUST be performed.*

A water hardness test must be performed to determine if a water treatment system needs to be installed.

## WATER SUPPLY CONNECTION: WATER HARDNESS GREATER THAN 3 GPG

If water hardness tests at greater than 3 GPG, install the Scaltrol Water Treatment system (see Plumbing Options page) into the water line before the machine's incoming water connection point. A water shut-off valve should be installed to allow access for service.

## WATER SUPPLY CONNECTION: WATER HARDNESS LOWER THAN 3 GPG

If water hardness tests at lower than 3 GPG, install the water supply line directly to the machine's incoming water connection point. A water shut-off valve should be installed to allow access for service.

**PRESSURE REGULATOR**

The manufacturer recommends the installation of a pressure regulating valve (PRV) in the incoming water line to ensure proper flowrate at all times and offers these devices as options (see Plumbing Options page).

Do not confuse static pressure with flow pressure. Static pressure is the line pressure in a “no flow” condition (all valves and services are closed). Flow pressure is the pressure in the fill line when the fill valve is opened during the cycle.

**SHOCK ABSORBER**



The manufacturer recommends the installation of a shock absorber in the incoming water line and offers these devices as options (see Plumbing Options page). This prevents line hammer/hydraulic shock—induced by the solenoid valve as it operates—from causing damage to the equipment.

**CONNECTING THE DRAIN LINE**

The machine's drain is a gravity-discharge drain. All piping from the 1 1/2” NPT connection on the wash tank must be pitched (1/4” per foot) to the floor or sink drain. All piping from the machine to the drain must be a minimum 1 1/2” NPT and must not be reduced. There must also be an air-gap between the machine drain line and the floor sink or drain. If a grease trap is required by code, it should have a flow capacity of 5 GPM.

**CHEMICAL & EXHAUST FAN ELECTRICAL CONNECTIONS**

Remove control box lid and make chemical and exhaust fan connections at the points shown below:

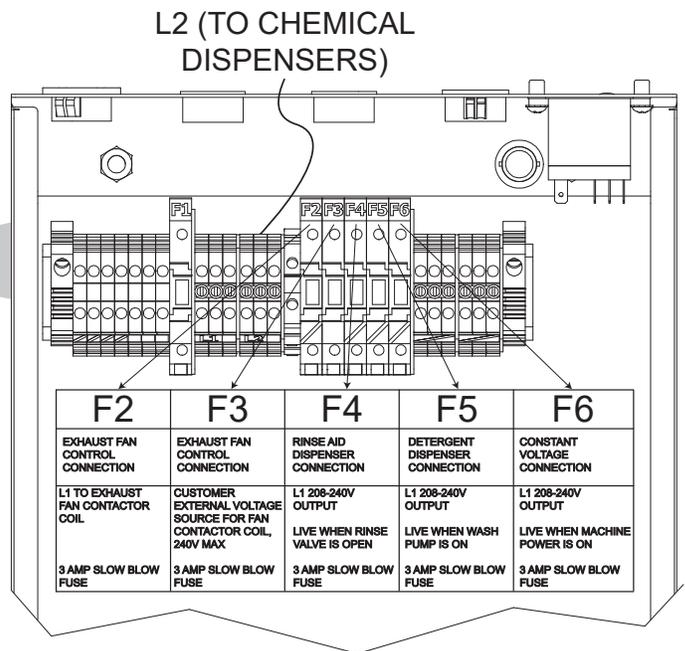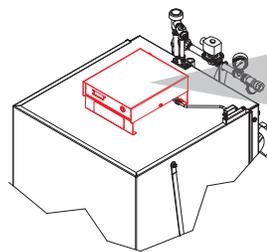

## CHEMICAL CONNECTIONS

*Chemical connections should be made by the chemical supplier.*


*Using deionized water or other aggressive fluids will result in corrosion and failure of components and will void the warranty.*



**WARNING!** Some of the chemicals used in dishwashing can cause chemical burns if they come in contact with skin. Wear protective gear when handling these chemicals. If any skin comes in contact with these chemicals, immediately follow the instructions provided with the chemicals for treatment.


### Detergent

Connect detergent by removing the bulkhead fitting on back of the machine and replacing it with the appropriate dispensing equipment.

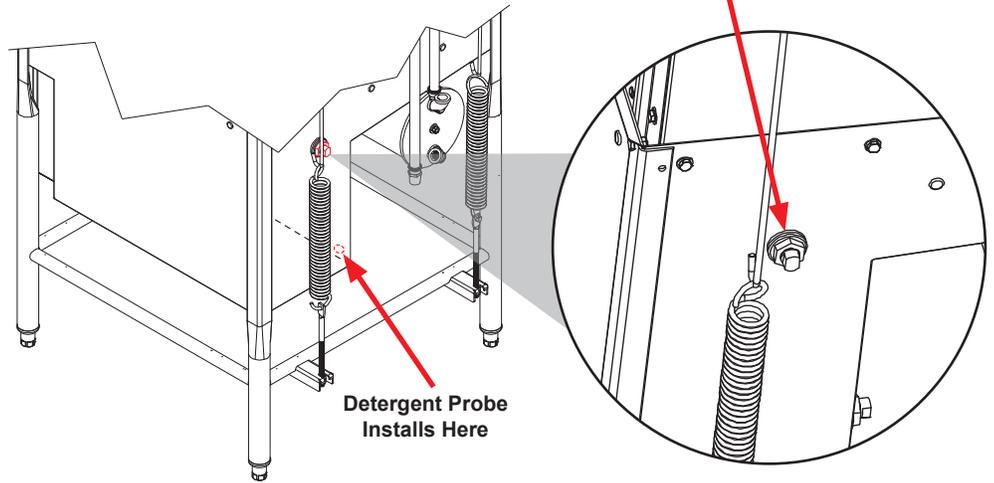

### Rinse-aid

Connect rinse-aid by removing the brass plug at the base of the rinse injector and replacing it with the appropriate dispensing equipment.

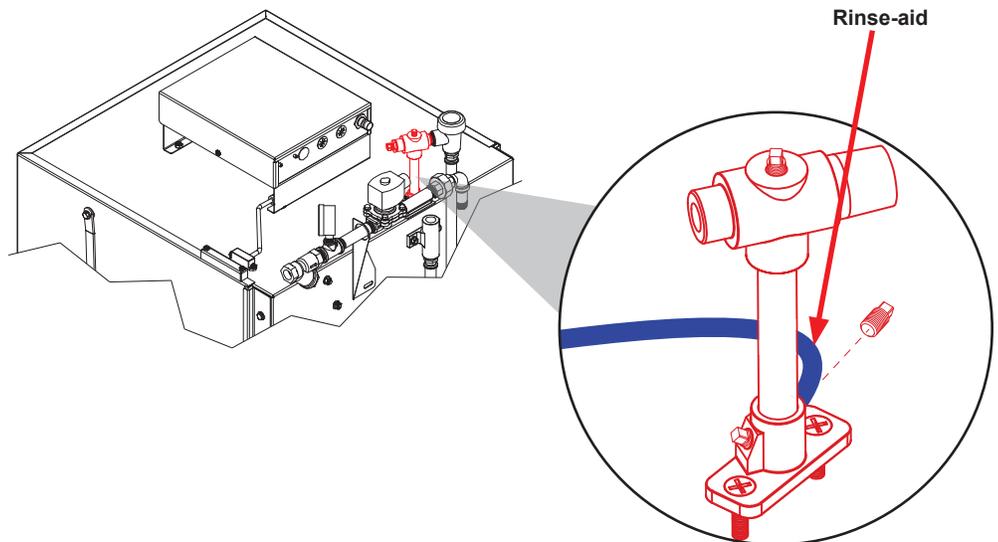

## PLUMBING CHECK

Slowly turn on water supply to the machine after incoming fill line and drain line have been installed. Check for any leaks and repair as required. All leaks must be repaired before operating the machine.

## ELECTRICAL POWER CONNECTIONS

Electrical and grounding conductors must comply with the applicable portions of the National Electric Code ANSI/NFPA 70 (latest edition) and/or other electrical codes.





*Disconnect electrical power supplies and lockout/tagout in accordance with appropriate procedures and codes at the disconnect switch.*

*If necessary, see Heaters page for phase conversion kit.*

Data plate is located on the right side of the machine. Refer to data plate for machine operating requirements, machine voltage, total amperage, and serial number.

1. Open electrical box at bottom-front of machine by using a phillips screwdriver to remove the two screws.
2. Install 3/4" conduit into the pre-punched hole in bottom of electrical box.
3. Route power wires and connect to power block and grounding lug.
4. Install service wires (L3 for 3-Phase only) to the appropriate terminal.

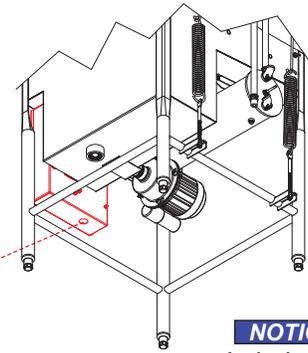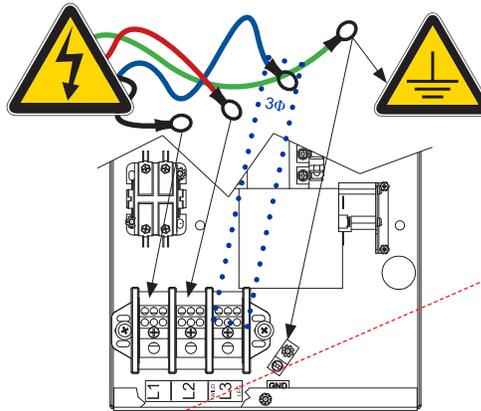


**NOTICE**  
*Imbalanced wild leg goes to L3.*

5. Install grounding wire into the lug provided.
6. Tighten connections.

**NOTICE** "DE-OX" or similar anti-oxidation agent should be used on all power connections.


## MOTOR ROTATION

On 460 V 3-Phase machines only, correct pump motor rotation must be verified before the machine is operated. Failure to do so can result in damage to the machine and components.



**CAUTION!** *On 460 V 3-Phase machines only, correct pump motor rotation must be verified before operation!*

1. Follow Filling the Wash Tub section.
2. Locate wash pump motor and identify the arrow decal which shows the correct motor rotation (if no decal is present, correct rotation is away from the pump volute).

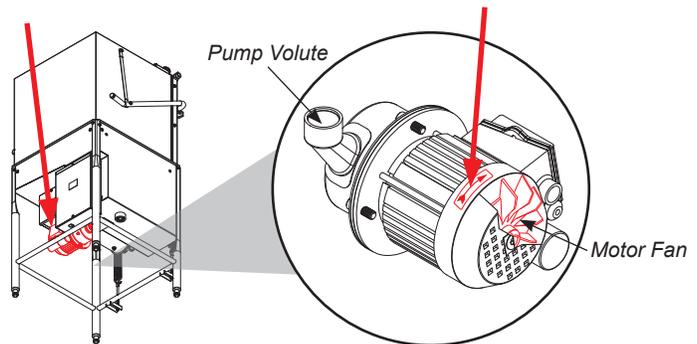

3. Start the machine.
4. Observe rotation of motor fan and quickly stop the machine.
5. If rotation is incorrect, disconnect electrical power and reverse the L1 and L2 connections at terminal block shown in the section above.

**VOLTAGE CHECK** Apply power to the machine. Check incoming power at terminal block and ensure it corresponds with the voltage listed on the data plate. If not, contact a qualified service agency to examine the problem. Do not run the machine if voltage is too high or too low. Shut off service breaker and advise all proper personnel of the location of the breaker and any problems. Replace control box cover and tighten-down screws.



---

**SURROUNDING AREA** This is a commercial dishmachine and reaches temperatures that can exceed those generated by a residential machine. Surrounding countertops, cabinets, flooring material, and subflooring material must be designed and/or selected with these higher temperatures in mind.


**NOTICE** *Any damage to surrounding area caused by heat/moisture to materials that are not recommended for higher temperatures will not be covered under warranty or by the manufacturer.*

---

**TEMPERATURE SETPOINTS** The temperature setpoints on this machine have been set at the factory. They should only be adjusted by an authorized service agent.

**PREPARATION** Before operating the machine, verify the following:

1. Tank is clean and free of debris.
2. Wash arms, rinse arms, and scrap screen are installed correctly.
3. Sump strainer and standpipe (located under scrap screen) are installed correctly and standpipe is down.

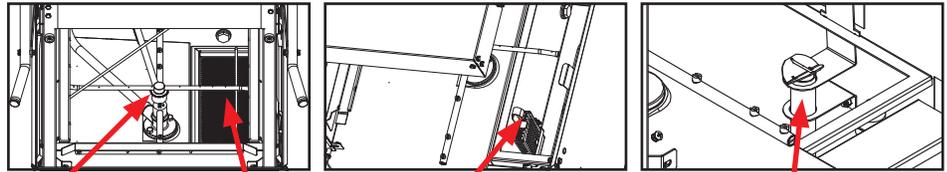

Wash &amp; Rinse Arms, Scrap Screen

Sump Strainer

Standpipe

**POWER UP** To energize the machine, turn on the power at the service breaker. The voltage should have been previously verified as correct. If not, the voltage must be verified.

- FILLING THE WASH TUB**
1. Close door.
  2. Press power button.
  3. LED ring on power button will turn red.



4. Machine will start filling automatically.
5. Wait until wash temperature on display reaches a minimum of 150 °F.

**WARE PREPARATION** Proper ware preparation will help ensure good results and fewer re-washes. If not prepared properly, ware might not come out clean and the efficiency of the machine will be reduced. Putting unscrapped dishes into the machine affects its performance, so scraps should always be removed from ware before being loaded into a rack. Pre-rinsing and pre-soaking are good ideas, especially for silverware and casserole dishes.

**DAILY MACHINE PREPARATION** Place cups and glasses upside-down in racks so they don't hold water during the cycle. The machine sanitizes as well as cleans. To do this, ware must be properly prepared before being placed in the machine.

Refer to the Preparation section and follow the instructions there. Afterward, ensure that chemicals are supplied to the machine. If not, contact your chemical supplier.

**WASHING A RACK OF WARE**

1. Ensure wash temperature has reached a minimum of 150 °F.
2. Open door completely.
3. Slide rack of ware into the machine.
4. Close door and cycle starts automatically. LED ring on power button will turn green.



5. When LED ring on power button turns red, cycle is complete.
6. Open door and remove rack of clean ware.
7. Replace with a rack of soiled ware and close door. Repeat this process.

**OPERATIONAL INSPECTION**

Based on use, the scrap screen might become clogged with soil and debris as the workday progresses. Operators should regularly inspect the scrap screen to ensure it has not become clogged. If clogged, it will reduce the washing capability of the machine. Instruct operators to clean-out the scrap screen at regular intervals or as required by workload. Do NOT beat strainers to remove debris.

**SHUTDOWN & CLEANING**


1. Turn machine off by pushing power button. Display and LED will turn off.



2. Open door and allow steam/heat to escape.
3. Raise standpipe and allow tub to drain.




**WARNING! Wash tank water will be hot!**

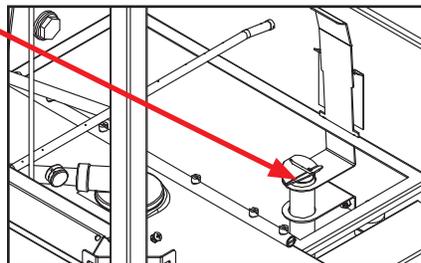


**SHUTDOWN &  
CLEANING**


4. Remove sump strainer and scrap screen.

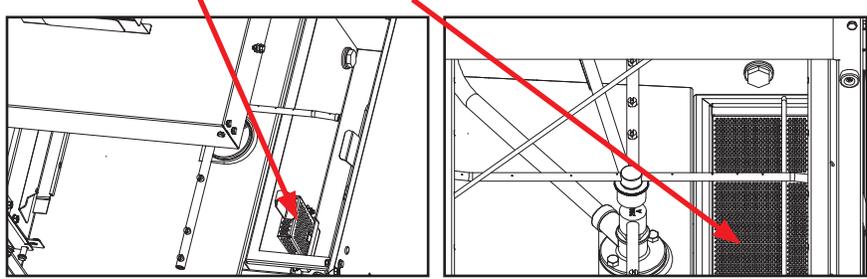


5. Use a hand-scraper to scrape foodsoil into a trash basket.

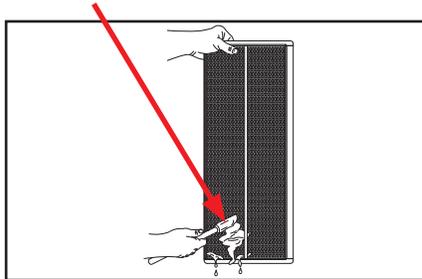

6. Rinse with pre-rinse hose and replace.  
7. Remove all wash and rinse arms.

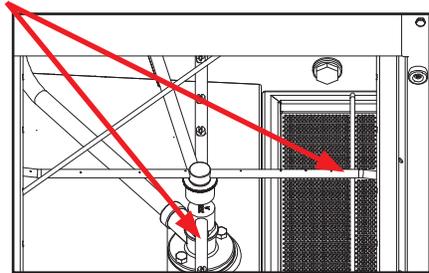


8. Remove end-caps from the arms.

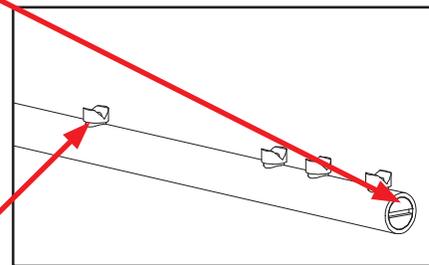


9. Clean nozzles with a brush.  
10. Use a small wire or toothpick to remove remaining debris or lime deposits from the nozzles.  
11. Flush the arms with water.

**SHUTDOWN & CLEANING**


12. Replace end-caps and ensure they have been tightened.

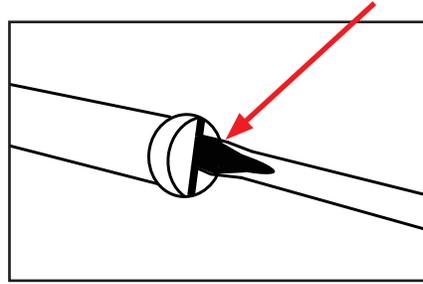


13. Spray or wipe out interior of the machine.

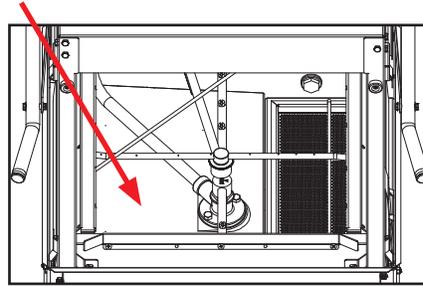

14. Replace wash and rinse arms.

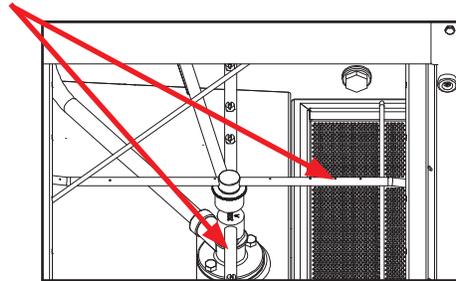

15. Ensure sump strainer and scrap screen are clean and securely in place.

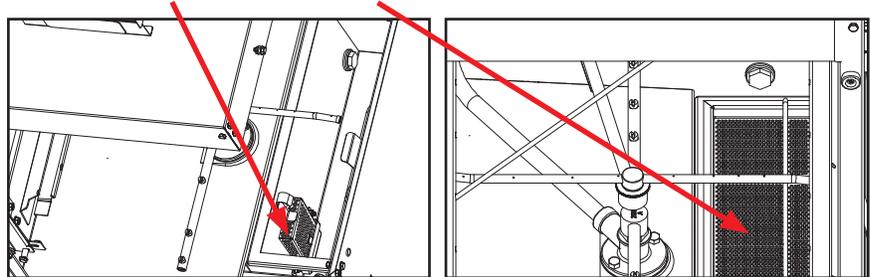

16. Use stainless steel polish to clean and protect outside of the machine.

**DETERGENT CONTROL**

Detergent usage and water hardness are two factors that contribute greatly to how efficiently this machine will operate. Using detergent in the proper amount can become a source of substantial savings. A qualified water treatment specialist can determine what is needed for maximum efficiency from the detergent.


*See Water Supply Connection section for more information on water treatment.*

1. Hard water greatly affects the performance of the machine, causing the amount of detergent required for washing to increase. If the machine is installed in an area with hard water, the manufacturer recommends the installation of water treatment equipment.
2. Deposited solids from hard water can cause spotting that will not be removed with a drying agent. Treated water will reduce this occurrence.
3. Treated water might not be suitable for use in other areas of operation and it might be necessary to install a water treatment system for the water going to the machine only. Discuss this option with a qualified water treatment specialist.
4. Machine operators should be properly trained on how much detergent is to be used per cycle. Meet with a water treatment specialist and detergent vendor to discuss a complete training program for operators.
5. These machines require that chemicals be provided for proper operation and sanitization and require the installation of third-party chemical feeders to introduce these chemicals to the machine. Contact a chemical supplier with any questions.
6. Water temperature is an important factor in ensuring that the machine functions properly. The machine's data plate details what the minimum temperatures must be for the incoming water supply, the wash tank, and the rinse tank. If minimum requirements are not met, there is a possibility that dishes will not be clean or sanitized.
7. Instruct machine operators to observe the required temperatures and to report when they fall below the minimum allowed. A loss of temperature can indicate a larger problem.



**DELIMING** Tank capacities of the machine are listed on the Operating Parameters page.


1. With power button on, raise door and lift standpipe to drain the machine.

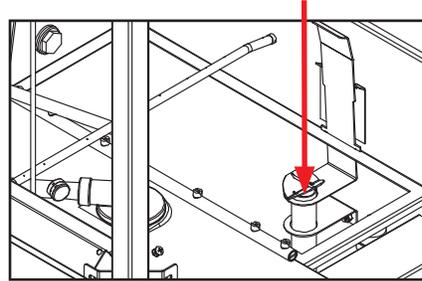

2. Allow machine to completely drain.
3. Add deliming solution to tub per chemical supplier's instructions.
4. Close door. The machine will fill and turn on heaters.
5. Once filling has stopped, press and hold power button until blue delime button turns on (about three seconds). Release button and machine will start delime cycle.



6. Display will count down the delime cycle and shut off once complete. If the machine is not delimed, run delime cycle again.
7. Raise door and lift standpipe to drain the machine.

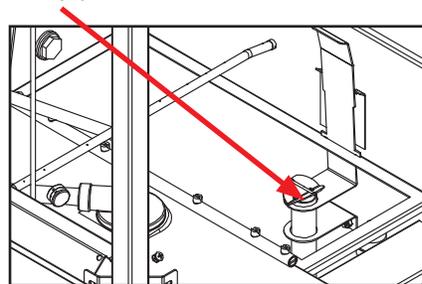

8. Once drained, put standpipe back in place and close door to refill the machine.
9. The machine is ready to wash ware once minimum wash temperature is reached.



**CAUTION!** This equipment is not recommended for use with deionized water or other aggressive fluids. Using deionized water or other aggressive fluids will result in corrosion and failure of components and will void the warranty.

**PREVENTATIVE MAINTENANCE**



The manufacturer highly recommends that any maintenance and repairs not specifically discussed in this manual be performed only by qualified service personnel.

**WARNING!** *Unqualified personnel performing maintenance on the machine may void the warranty, lead to larger problems, or cause harm to the operator.*



Following the operating and cleaning instructions in this manual will result in the most efficient results from the machine. As a reminder, here are some steps to take to ensure the machine is being used the way it was designed to work:

**CAUTION!**  
*Do NOT beat strainers to remove debris!*

1. Ensure water temperatures match those listed on the machine data plate. A loss of temperature can indicate a larger problem.
2. Ensure all strainers are clean and securely in place before operating the machine. When cleaning out strainers, do NOT beat them on waste cans. Wipe out strainers with a rag and rinse with water if necessary. Use a toothpick to dislodge any stubborn debris.
3. Ensure all wash and rinse arms are secure in the machine before operating.
4. Ensure standpipe is in position before operating.
5. Remove as much soil from dishes by hand as possible before loading into racks.
6. Do not overfill racks.
7. Ensure glasses are placed upside-down in the rack.
8. Ensure all chemicals being injected into the machine are at correct concentrations.
9. Clean the machine at the end of every day/shift per the Shutdown and Cleaning section of this manual.
10. Follow all safety procedures, whether listed in this manual or put forth by local, state, or national codes/regulations.

## ADJUSTING WASH TEMP SETPOINT

To access setpoints, the machine should be on and not in cycle.

1. Push and hold button for a minimum of six seconds. Wash temperature shows on display and will flash on and off.



2. Once button is released, each press and release of button fewer than three seconds will advance wash temperature one degree at a time to a maximum of 170 °F, and will then roll over to 150 °F and advance up again.



3. Once desired temperature is selected, press and hold button for a minimum of three seconds and no more than six seconds (after three seconds wash temperature will stop flashing). Release button to accept and move to next setting (rinse temperature).



*If there is no activity (button presses) for 30 seconds, display will exit setpoints mode without saving changes.*

## ADJUSTING RINSE TEMP SETPOINT

1. Once setting changes to rinse temperature, rinse temperature shows on display and will flash on and off.



2. Each press and release of button fewer than three seconds will advance wash temperature one degree at a time to a maximum of 192 °F, and will then roll over to 180 °F and advance up again.



*If there is no activity (button presses) for 30 seconds, display will exit setpoints mode without saving changes.*


### ADJUSTING RINSE TEMP SETPOINT

1. Once desired temperature is selected, press and hold button for a minimum of three seconds and no more than six seconds (after three seconds rinse temperature will stop flashing). Release button to accept and move to next setting (temperature scale).



### CHANGING TEMPERATURE SCALE

1. Once setting changes to temperature scale, °F or °C will flash on and off.

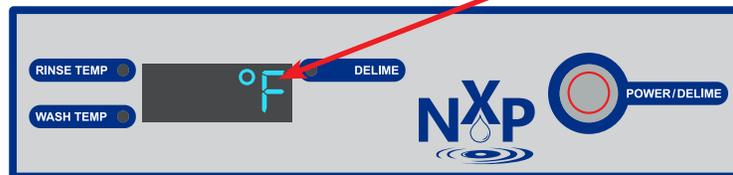

2. Each press and release of button fewer than three seconds will toggle between °F and °C on display.



3. Once desired temperature scale is selected, press and hold button for a minimum of three seconds and no more than six seconds (after three seconds temperature scale will stop flashing). Release button to accept and move to next setting (back to wash temperature).



4. To exit setpoints at any time, hold button for a minimum of six seconds. Display wash temperature will stop flashing. The machine is ready to operate.



*If there is no activity (button presses) for 30 seconds, display will exit setpoints mode without saving changes.*

DISPLAY SHOWS	POSSIBLE CAUSE	REMEDY
"F1 Service needed," "No water in Booster"	<ol style="list-style-type: none"> <li>1. Low or no water pressure.</li> <li>2. Faulty pressure switch.</li> <li>3. Faulty inlet valve or fill relay.</li> <li>4. Contactor to booster heater not turning off.</li> <li>5. Faulty temperature input (P12) on IO module.</li> <li>6. Faulty temperature probe (T3).</li> <li>7. Faulty float switch allows heaters to operate with no water in tank.</li> </ol>	<ol style="list-style-type: none"> <li>1. Perform PSI check (see Preventative Maintenance page).</li> <li>2. Replace pressure switch.</li> <li>3. Verify that fill relay is supplying voltage to fill solenoid. Replace faulty component.</li> <li>4. Check for welded contacts. Verify that output from IO module turns off when above the set temperature.</li> <li>5. Substitute a 1.2 kΩ resistor for T3, and verify that booster heater turns off. If not, replace IO module.</li> <li>6. Verify that the booster-probe resistance is correct with respect to temperature (see table on pg. 23). If not, replace T3.</li> <li>7. Replace float switch.</li> </ol>
"F2 Service needed," "Check booster thermostat"	<ol style="list-style-type: none"> <li>1. Contactor to booster heater not turning off.</li> <li>2. Faulty temperature input (P12) on IO module.</li> <li>3. Faulty temperature probe (T3).</li> </ol>	<ol style="list-style-type: none"> <li>1. Check for welded contacts. Verify that output from IO module turns off when above the set temperature.</li> <li>2. Substitute a 1.2 kΩ resistor for T3, and verify that booster heater turns off. If not, replace IO module.</li> <li>3. Verify that the booster probe resistance is correct with respect to temperature (see table on pg. 23). If not, replace T3.</li> </ol>
"F3 No water in wash tank," "Check inlet water and door"	<ol style="list-style-type: none"> <li>1. Malfunction of fill solenoid or fill relay.</li> <li>2. Door is open, which inhibits fill mode.</li> <li>3. Faulty door switch.</li> </ol>	<ol style="list-style-type: none"> <li>1. Replace faulty component.</li> <li>2. Close door to activate door switch.</li> <li>3. Replace or adjust door switch.</li> </ol>
"F4 Service needed," "Check incoming power"	<ol style="list-style-type: none"> <li>1. Incoming power not properly connected.</li> <li>2. L3 is missing (3-phase machines only).</li> </ol>	<ol style="list-style-type: none"> <li>1. Check connections to heater.</li> <li>2. Verify that L3 is present and connected properly.</li> </ol>
"F5 Service needed," "Check booster thermostat and high limit"	<ol style="list-style-type: none"> <li>1. Faulty temperature input (P12) on IO module.</li> <li>2. Faulty temperature probe (T3).</li> <li>3. Faulty high-limit switch.</li> <li>4. Faulty booster heater.</li> <li>5. Booster-heater contactor not energizing.</li> </ol>	<ol style="list-style-type: none"> <li>1. Substitute a 1.8 kΩ resistor for T3, and verify that booster heater turns on. If not, replace IO module.</li> <li>2. Verify that T3 resistance is consistent with the table on pg. 23. If not, replace T3.</li> <li>3. Replace high-limit switch.</li> <li>4. Check booster heater for proper resistance. Replace if incorrect.</li> <li>5. Verify that drive voltage to contactor coil is present during a call for heat and that contactor closes. If voltage is present, replace contactor. If voltage is not present, check wiring.</li> </ol>

DISPLAY SHOWS	POSSIBLE CAUSE	REMEDY
"F6 Service needed," "No water in wash tank"	<ol style="list-style-type: none"> <li>1. Low or no water pressure.</li> <li>2. Faulty inlet valve or fill relay.</li> <li>3. Contactor to wash heater not turning off.</li> <li>4. Faulty temperature input (T1) on IO module.</li> <li>5. Faulty temperature probe (T1).</li> <li>6. Faulty float switch allows heaters to operate with no water in tub.</li> </ol>	<ol style="list-style-type: none"> <li>1. Perform PSI check (see Preventative Maintenance page).</li> <li>2. Verify that fill relay is supplying voltage to fill solenoid. Replace faulty component.</li> <li>3. Check for welded contacts. Verify that output from IO module turns off when above the set temperature.</li> <li>4. Substitute a 1.2 kΩ resistor for T1, and verify that wash heater turns off. If not, replace IO module.</li> <li>5. Verify that T1 resistance is correct with respect to temperature (see table on pg. 23). If not, replace T1.</li> <li>6. Replace float switch.</li> </ol>
"F7 Service needed," "Check wash tank thermostat"	<ol style="list-style-type: none"> <li>1. Contactor to wash heater not turning off.</li> <li>2. Faulty temperature input (P10) on IO module.</li> <li>3. Faulty temperature probe (T1).</li> </ol>	<ol style="list-style-type: none"> <li>1. Check for welded contacts. Verify that output from IO module turns off when above the set temperature.</li> <li>2. Substitute a 1.2 kΩ resistor for T1, and verify that wash heater turns off. If not, replace IO module.</li> <li>3. Verify that T1 resistance is correct with respect to temperature (see table on pg. 23). If not, replace T1.</li> </ol>
"F8 No water in wash tank," "Check inlet water and door"	<ol style="list-style-type: none"> <li>1. Malfunction of fill solenoid or fill relay.</li> <li>2. Door is open, which inhibits fill mode.</li> <li>3. Faulty door switch.</li> </ol>	<ol style="list-style-type: none"> <li>1. Replace faulty solenoid or fill relay.</li> <li>2. Close door to activate door switch.</li> <li>3. Replace or adjust door switch.</li> </ol>
"F9 Service needed," "Check incoming power"	<ol style="list-style-type: none"> <li>1. Incoming power not properly connected.</li> <li>2. L3 is missing (3-phase machines only).</li> </ol>	<ol style="list-style-type: none"> <li>1. Check connections to heater.</li> <li>2. Verify that L3 is present and connected properly.</li> </ol>
"F10 Service needed," "Check wash tank thermostat and high limit"	<ol style="list-style-type: none"> <li>1. Faulty temperature input (T1) on I/O module.</li> <li>2. Faulty temperature probe (T1).</li> <li>3. Faulty high-limit switch.</li> <li>4. Faulty wash heater.</li> <li>5. Wash-heater contactor not energizing.</li> </ol>	<ol style="list-style-type: none"> <li>1. Substitute a 1.8 kΩ resistor for T1, and verify that wash heater turns on. If not, replace I/O module.</li> <li>2. Verify that T1 resistance is correct with respect to temperature (see table on pg. 23). If not, replace T1.</li> <li>3. Replace high-limit switch.</li> <li>4. Check wash heater for proper resistance. Replace if incorrect.</li> <li>5. Verify that drive voltage to contactor coil is present during a call for heat and that contactor closes. If voltage present, replace contactor. If voltage not present, check wiring.</li> </ol>
"F11 Service needed," "Check wash tank thermostat"	Faulty temperature probe (T1).	Replace probe that connects to P10.

DISPLAY SHOWS	POSSIBLE CAUSE	REMEDY
"F12 Service needed," "Check booster thermostat"	Faulty temperature probe (T3).	Replace probe that connects to P13.
"F13 Communication error," "Check 6-pin cable"	<ol style="list-style-type: none"> <li>1. Loose connection in 6-pin cable between display board and I/O module.</li> <li>2. Faulty 6-pin cable between display board and I/O module.</li> <li>3. Faulty communication port on I/O module or display board.</li> </ol>	<ol style="list-style-type: none"> <li>1. Fully disconnect 6-pin cable at each end, and reconnect each end until a click is heard.</li> <li>2. Inspect for broken wire or unseated terminal by gently pulling on each wire at each end of the cable. Reseat any loose terminals by inserting it fully into the housing using long-nosed pliers. Replace cable if broken wire is found.</li> <li>3. Temporarily substitute a verified good display board, and check if F13 message recurs. If so, repeat substitution with a good I/O module.</li> </ol>
"F14 Service needed," "Check incoming water pressure or pressure switch"	<ol style="list-style-type: none"> <li>1. Low or no water pressure.</li> <li>2. Faulty pressure switch.</li> <li>3. Faulty fill valve or fill valve not receiving power.</li> </ol>	<ol style="list-style-type: none"> <li>1. Perform PSI check (see Preventative Maintenance page).</li> <li>2. Replace pressure switch.</li> <li>3. Check continuity and replace if faulty.</li> </ol>
"F15 Sanisure violation"	<ol style="list-style-type: none"> <li>1. Faulty booster heater.</li> <li>2. Faulty heater contactor.</li> </ol>	<ol style="list-style-type: none"> <li>1. Check amperage on heater.</li> <li>2. Check voltage on contactor coil and L1 and L2 legs.</li> </ol>
"F16 LLC violation"	Faulty or corroded probe.	Clean or replace probe.
"F17 Excessive inlet temp"	Inlet water supply too hot.	Ensure inlet water supply is at required temperature.

**RESISTANCE-TO-TEMPERATURE VALUES**

R (kΩ)	°F
11.58	69.8
10.37	75.2
9.30	80.6
7.78	89.6
3.05	140.0
2.54	150.8
2.18	159.8
1.58	179.6
1.45	185.0
1.33	190.4
1.16	199.4
0.96	212.0



**WARNING!** Inspection, testing, and repair of electrical equipment should only be performed by a qualified service technician. Many of the tests require that the machine have power to it and live electrical components be exposed. USE EXTREME CAUTION WHEN TESTING THE MACHINE.

OBSERVATION	POSSIBLE CAUSE	REMEDY
Machine will not fill after the door is closed. Power "ON" light is illuminated.	<ol style="list-style-type: none"> <li>Faulty rinse solenoid valve.</li> <li>Faulty door switch.</li> <li>Fouled/faulty float switch.</li> </ol>	<ol style="list-style-type: none"> <li>Repair or replace valve as required.</li> <li>Verify the wiring of the switch; if correct, replace the switch.</li> <li>Clean float switch if fouled. If clean and still not working, replace.</li> </ol>
Machine will not fill after the door is closed. Power "ON" light is NOT illuminated.	<ol style="list-style-type: none"> <li>Service breaker tripped.</li> <li>Machine not connected to power source.</li> <li>Faulty power source.</li> </ol>	<ol style="list-style-type: none"> <li>Reset. If the breaker trips again, contact an electrician to verify the amp draw of the machine.</li> <li>Verify the machine has been properly connected to the power source.</li> <li>Verify the wiring of the switch; if correct, replace switch.</li> </ol>
Machine will not run after the door is closed. Power "ON" light is illuminated and the machine is filling.	<ol style="list-style-type: none"> <li>Wash motor faulty/damaged.</li> <li>Wash motor contactor faulty.</li> </ol>	<ol style="list-style-type: none"> <li>Verify the wash motor is getting power. If so, replace the motor.</li> <li>Check for continuity; if contacts are open, replace the contactor.</li> </ol>
Machine runs continuously in the wash cycle.	<ol style="list-style-type: none"> <li>Machine is in Delime mode.</li> <li>Timer faulty.</li> <li>Wash motor contactor faulty.</li> </ol>	<ol style="list-style-type: none"> <li>Exit Delime cycle.</li> <li>Replace timer module.</li> <li>Check for continuity; if contacts are open, replace the contactor.</li> </ol>
Wash or rinse heater does not work.	<ol style="list-style-type: none"> <li>Faulty heater element.</li> <li>Faulty heater contactor.</li> <li>Misadjusted thermostat.</li> <li>Faulty heater probe.</li> </ol>	<ol style="list-style-type: none"> <li>Check element for continuity; if open, replace the heater.</li> <li>Replace the contactor.</li> <li>Verify operation and setting of thermostats.</li> <li>Replace probe.</li> </ol>
Machine fills slowly and/or the rinse is weak.	<ol style="list-style-type: none"> <li>Clogged or obstructed rinse arms.</li> <li>Low incoming water pressure.</li> <li>Y-strainer is clogged.</li> </ol>	<ol style="list-style-type: none"> <li>Remove and clean the rinse arms.</li> <li>Adjust the water pressure regulator to ensure there is 10 ± 2 PSI flow.</li> <li>Clean out the Y-strainer.</li> </ol>
Rinse water not reaching required temperature.	<ol style="list-style-type: none"> <li>Faulty rinse heater.</li> <li>Misadjusted thermostat.</li> <li>Rinse thermometer is defective.</li> <li>Faulty rinse tank probe.</li> </ol>	<ol style="list-style-type: none"> <li>Check element for continuity; if open, replace heater.</li> <li>Verify operation and setting of thermostats.</li> <li>Replace thermometer.</li> <li>Replace probe.</li> </ol>





**WARNING!** Inspection, testing, and repair of electrical equipment should only be performed by a qualified service technician. Many of the tests require that the machine have power to it and live electrical components be exposed. **USE EXTREME CAUTION WHEN TESTING THE MACHINE.**

OBSERVATION	POSSIBLE CAUSE	REMEDY
Machine doesn't drain.	<ol style="list-style-type: none"> <li>1. Drain clogged.</li> <li>2. Standpipe not removed before draining.</li> </ol>	<ol style="list-style-type: none"> <li>1. Remove obstruction.</li> <li>2. Remove standpipe.</li> </ol>
Incorrect water pressure displayed during Fill or Rinse modes.	<ol style="list-style-type: none"> <li>1. Water turned off.</li> </ol>	<ol style="list-style-type: none"> <li>1. Turn water on.</li> </ol>
Wash water is not reaching required temperature.	<ol style="list-style-type: none"> <li>1. Faulty wash heater.</li> <li>2. Misadjusted thermostat.</li> <li>3. Wash probe is defective.</li> </ol>	<ol style="list-style-type: none"> <li>1. Check element for continuity; if open, replace the heater.</li> <li>2. Verify operation and setting of thermostats.</li> <li>3. Replace probe.</li> </ol>
Door will not close completely.	<ol style="list-style-type: none"> <li>1. Improper spring tension.</li> <li>2. Obstruction in door channel.</li> <li>3. Door panels are not square with frame.</li> </ol>	<ol style="list-style-type: none"> <li>1. Adjust spring tension as required by loosening (not removing) spring bolt nuts and adjusting the tension. Tighten nuts back when done.</li> <li>2. Remove the obstruction.</li> <li>3. Adjust the frame to accommodate the door panels.</li> </ol>
Water leaks at the wash pump.	<ol style="list-style-type: none"> <li>1. Wash pump seal defective.</li> <li>2. Plug not shut/tight.</li> <li>3. Loose hoses (hose clamps) on the wash pump.</li> </ol>	<ol style="list-style-type: none"> <li>1. Replace the seal.</li> <li>2. Close or tighten.</li> <li>3. Tighten the hose clamps.</li> </ol>
Will not rinse during autocycle.	<ol style="list-style-type: none"> <li>1. Defective rinse solenoid.</li> <li>2. No water to the machine.</li> </ol>	<ol style="list-style-type: none"> <li>1. Repair or replace the rinse solenoid as required.</li> <li>2. Verify there is water at <math>10 \pm 2</math> PSI connected to the machine.</li> </ol>
Dishes are not coming clean.	<ol style="list-style-type: none"> <li>1. Machine temperatures are not up to the minimum requirements.</li> <li>2. No detergent/too much detergent.</li> </ol>	<ol style="list-style-type: none"> <li>1. Verify incoming water, rinse water, and wash water match the required temperatures as listed on the machine data plate.</li> <li>2. Adjust detergent concentration as required for the amount of water held by the machine.</li> </ol>

Fuse, 6.3 A, Slow-acting  
05920-004-90-73  
250 V, 5ST 6.3-R  
Qty - 1




Fuse, 3 A, Slow-blow  
05920-004-90-74  
250 V, 5TT-3-R  
Qty - 5

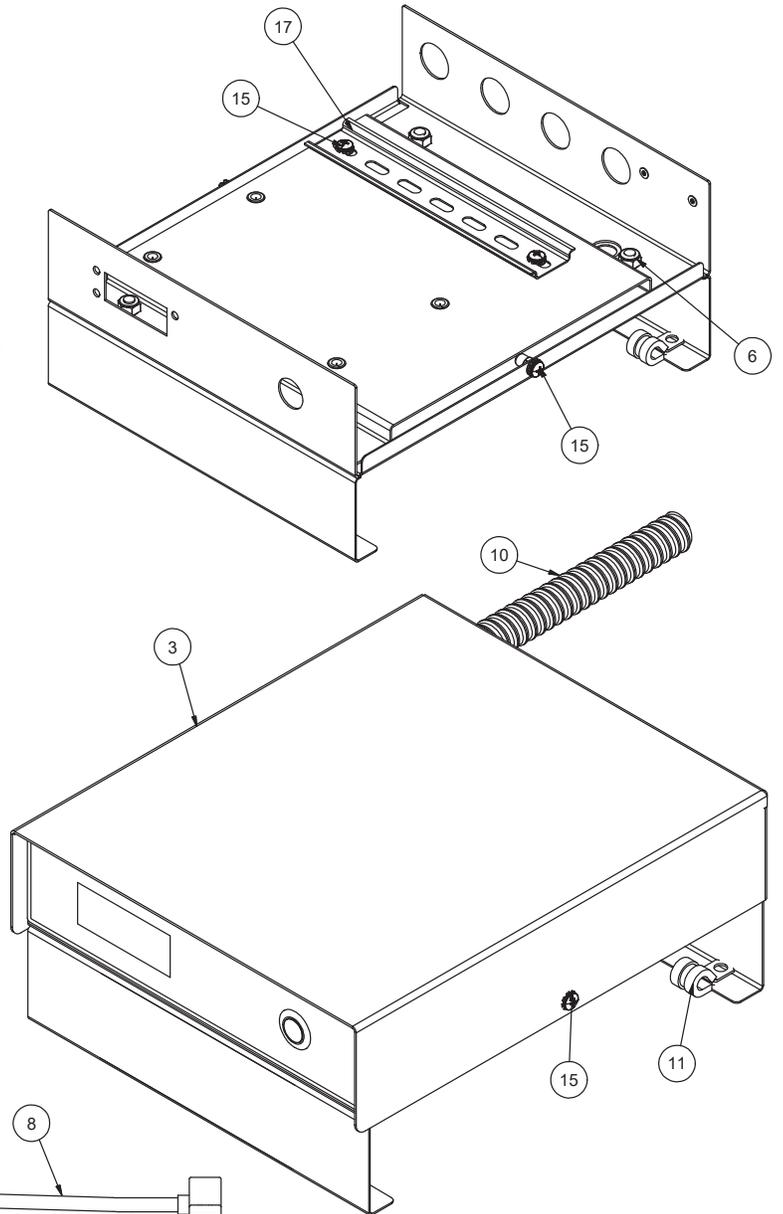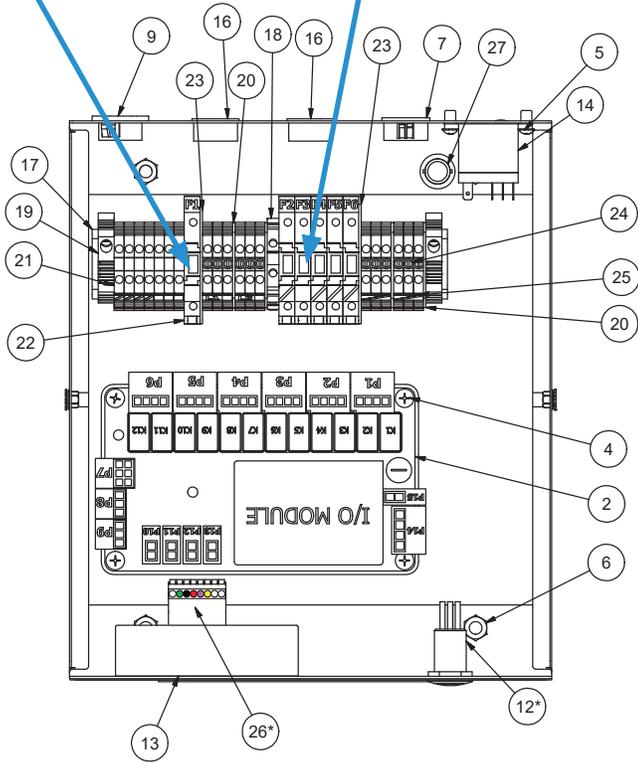


\*See Power Button Connector Wiring page for wiring diagram.

ITEM	QTY	DESCRIPTION	PART NUMBER
1	1	Decal, Control Box	09905-004-89-47
2	1	I/O Module	05945-004-98-57
3	1	Cover, Control Box	05700-004-85-14
4	4	Screw, 10-32 x 1"	05305-002-19-42
5	2	Screw, 6-32 x 3/8"	05305-002-25-91
6	4	Locknut, 1/4-20 Hex with Nylon Insert	05310-374-01-00
7	1	Plug	05975-011-47-81
8	1	Door, Cycle Switch	05930-002-36-80
9	1	Fitting, 1/2" Straight	05975-003-33-27
10	1	Conduit, 1/2" PVC Flex	05975-003-33-36
11	1	Clamp, Tubing with Rubber Cushion	04730-002-83-21
12*	1	Power Button	05930-004-85-60
13	1	Display, LED Temp	05945-004-85-61
14	1	Relay, 10 A, 220 V, AC Coil	05945-004-84-93
15	4	Screw, 10-32 x 1/2"	05306-004-42-04
16	2	Grommet, 7/8" Split	05975-200-40-00
17	1	Din-rail, 7"	05700-003-71-06
18	1	Terminal Block, Ground	05999-004-90-65
19	2	End Bracket, Terminal	05999-004-90-66
20	4	Separator, Terminal Block	05999-004-90-67
21	19	Terminal Block, Single Level	05999-004-90-68
22	6	Holder, Terminal Block Fuse	05999-004-90-69
23	2	End Bracket, Fuse Block	05999-004-90-70
24	4	Jumper Bars, 3-pole	05999-004-90-71
25	19	Tag, Marking 5 mm x 5 mm	05999-004-90-72
26*	1	Female Plug Pin	05935-004-91-16
27	1	Bushing, 1/2" Snap	05975-210-05-00


\*See Power Button Connector Wiring page for wiring diagram.

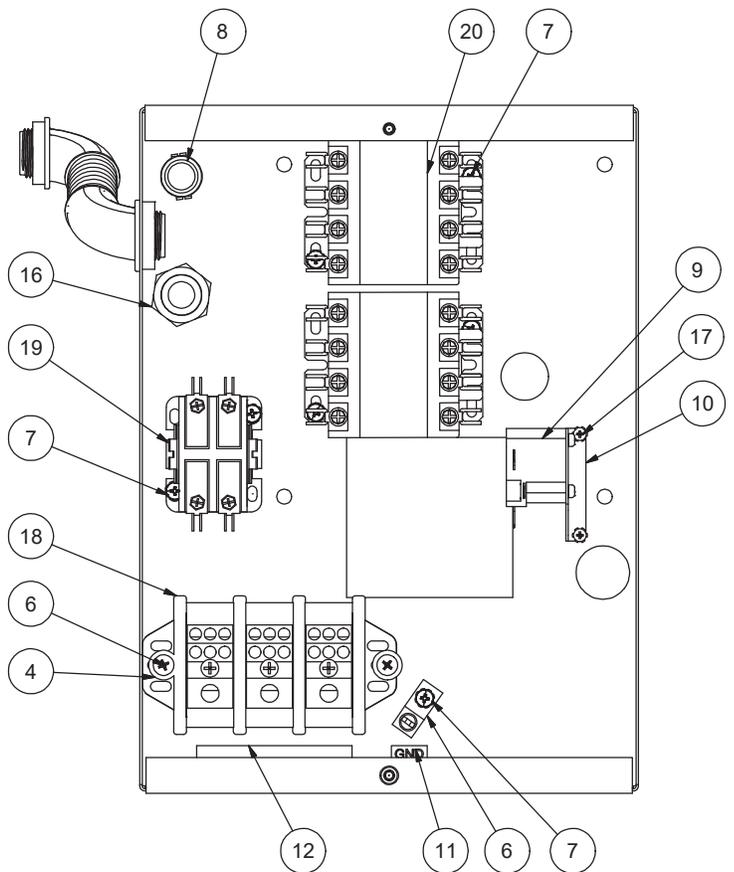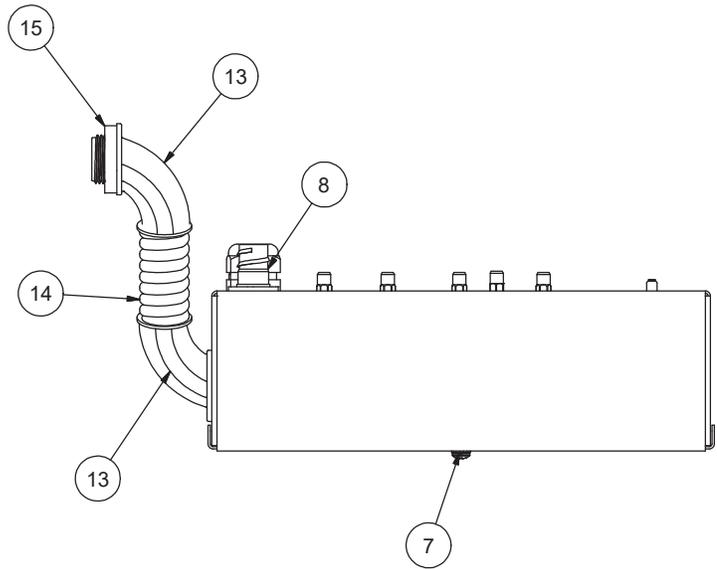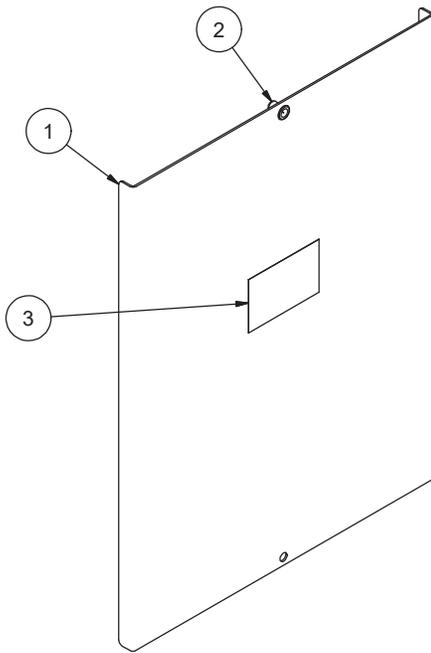


ITEM	QTY	DESCRIPTION	PART NUMBER
1	1	Cover, Electrical Box	05700-004-85-07
2	11	Nut, 10-32 Hex	05310-004-40-48
3	1	Decal, Warning-Disconnect Power	09905-100-75-93
4	2	Washer, Flat	05311-173-01-00
5	2	Screw, 10-32 x 3/4"	05305-011-62-17
6	1	Ground Lug	05940-200-76-00
7	9	Screw, 10-32 x 1/2"	05306-004-42-04
8	1	Fitting, 1/2" Straight	05975-003-33-27
9	1	Thermostat, High-limit	05930-004-33-12
10	1	Bracket, High-limit	05700-004-36-37
11	1	Decal, Ground	09905-011-86-86
12	1	Decal, L1 L2 L3	09905-004-37-05
13	2	Fitting, 90-degree, 3/4"	05975-004-19-42
14	1	Conduit, 1/2" PVC Flex	05975-003-77-47
15	2	Nut, Conduit Black Nylon, 3/4"	05975-003-81-29
16	1	Fitting	05975-011-65-51
17	2	Screw, 6-32 x 3/8"	05305-002-25-91
18	1	Terminal Block, 3-pole	05940-011-48-27
19	1	Contactor, 30 A, 240 VAC	05945-002-74-20
20	2	Contactor, Heater, 4-pole, 35 A, 208-240 VAC	05945-109-01-69

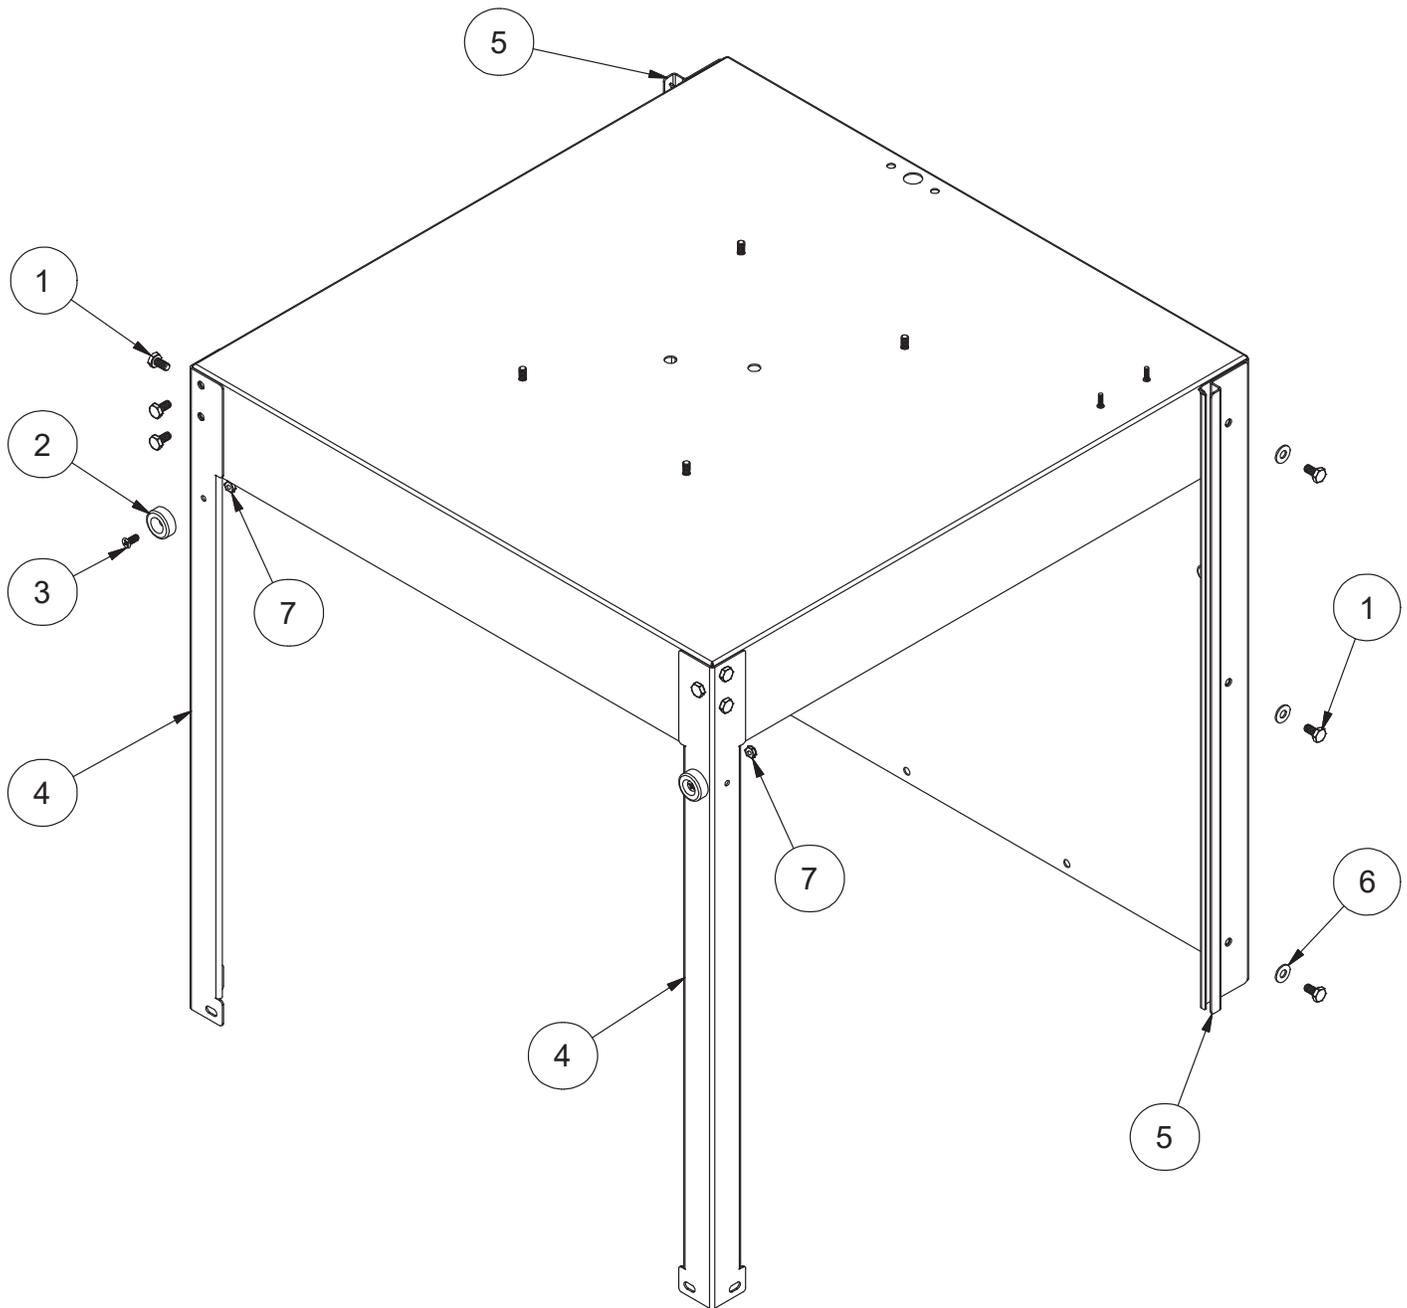


ITEM	QTY	DESCRIPTION	PART NUMBER
1	12	Bolt, 1/4-20 x 1/2"	05305-274-02-00
2	2	Guide, Hood	05700-004-90-99
3	2	Screw, 10-32 x 1/2"	05305-011-44-51
4	2	Support, Hood	05700-004-84-99
5	2	Guide, Hood, Rear	05700-004-87-24
6	6	Washer, 1/4-20	05311-174-01-00
7	2	Locknut, Low-profile, 10-32	05310-004-28-70

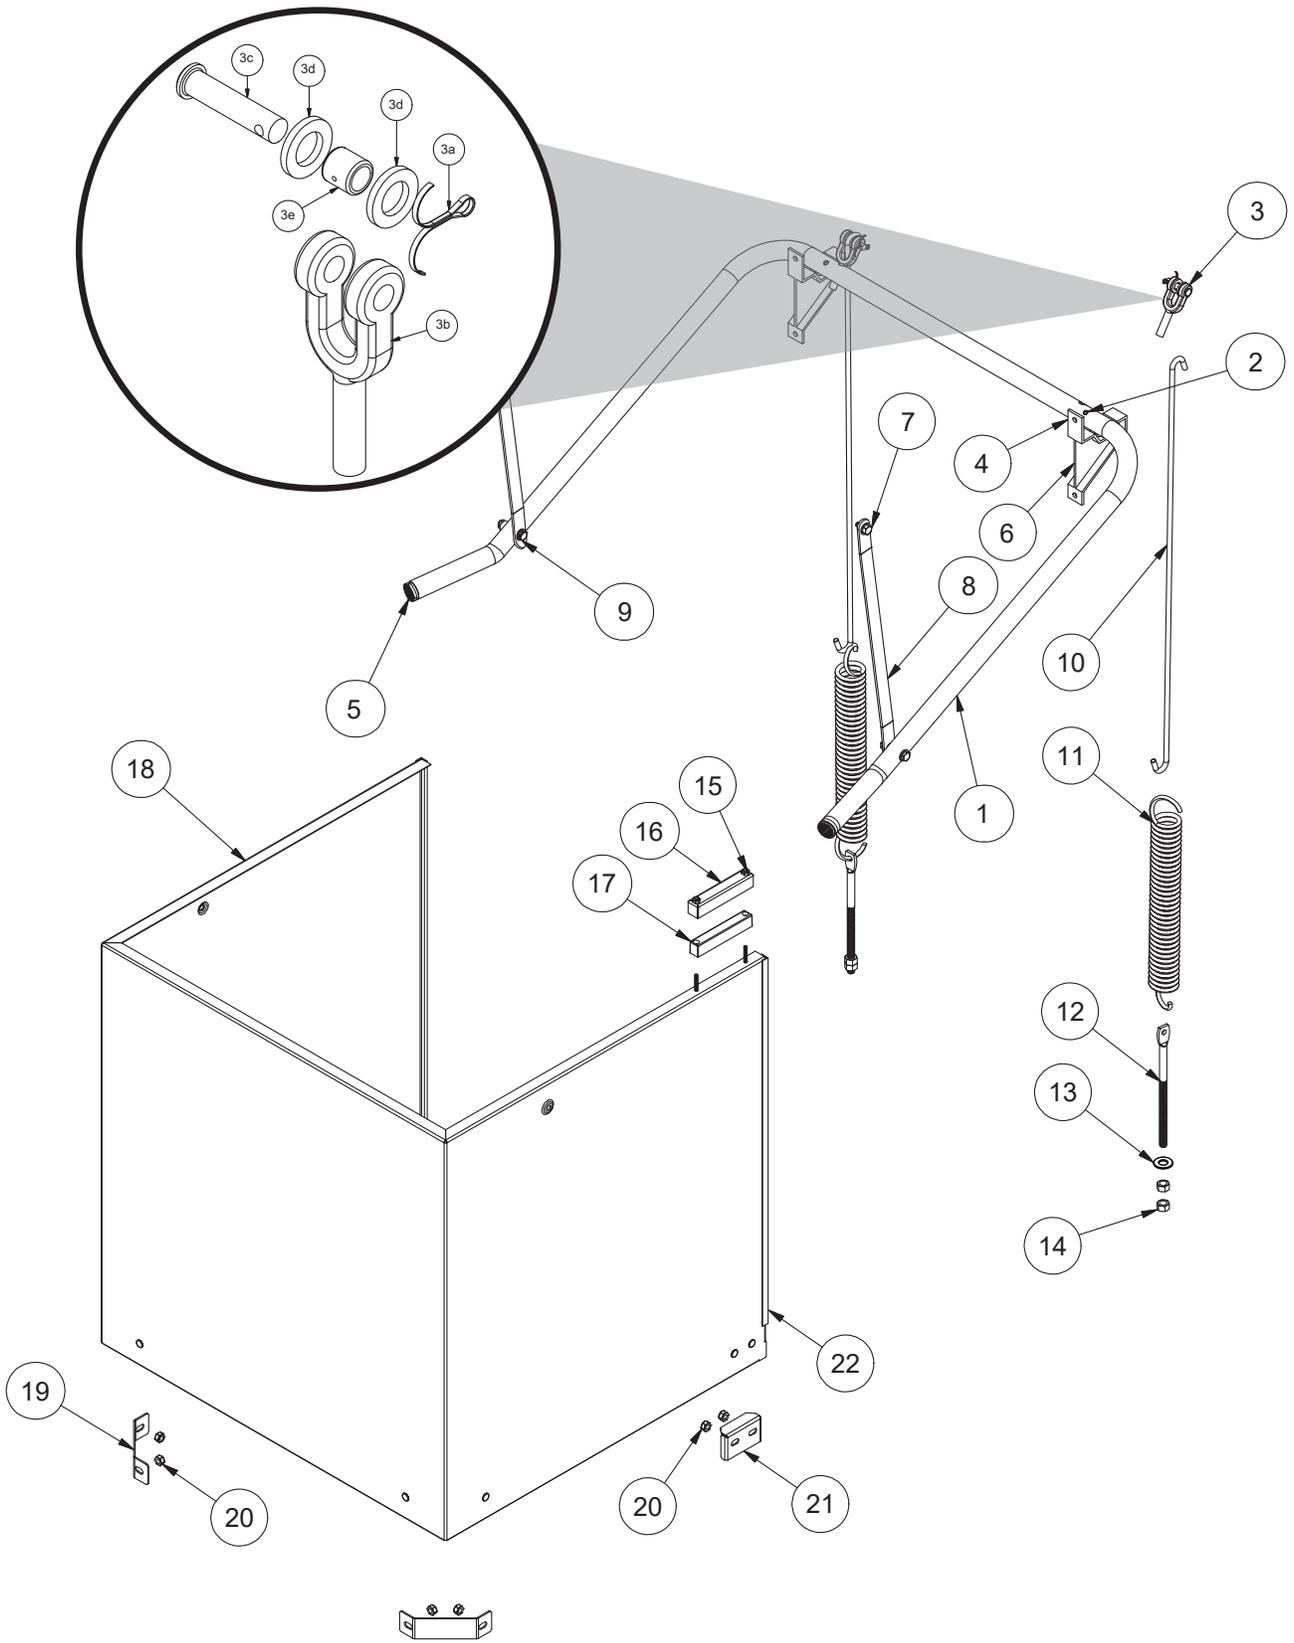

ITEM	QTY	DESCRIPTION	PART NUMBER
1	1	Complete Cantilever Arm Assembly (items 1-5) Cantilever Arm Only	05700-004-85-10 05700-001-21-00
2	2	Spring Pin, 1/4" x 1 1/8"	05315-407-06-00
3	2	Yoke Assembly	05700-000-75-77
3a	1	Cotter Pin	05315-207-01-00
3b	1	Yoke	05700-000-75-78
3c	1	Clevis Pin, 5/16" x 1 3/8"	05315-700-01-00
3d	2	Nylon Washer	05311-369-03-00
3e	1	Bushing	03120-100-03-00
4	2	Nut, Center Locknut 3/8-16	05310-256-04-00
5	2	Plug, Cantilever Arm	05340-011-35-00
6	2	Bracket, Cantilever Arm	05700-003-88-91
7	2	Screw, 1/4-20 x 5/8" Hex	05305-274-24-00
8	2	Connector, Door	05700-004-85-11
9	2	Screw, 1/4-20 x 1 1/2"	05305-274-23-00
10	2	Rod, Spring	05700-003-67-39
11	2	Spring	05340-109-02-00
12	2	Bolt, Cantilever Hanger Eye 3/8-16	05306-956-05-00
13	2	Washer, 3/8" ID x 7/8" OD	05311-176-02-00
14	4	Nut, 3/8-16 Hex	05310-276-01-00
15	2	Locknut, 8-32 Hex with Nylon Insert	05310-272-02-00
16	1	Cover, Door Magnet	05700-004-07-39
17	1	Magnet, Reed Switch	05930-111-51-68
18	1	Door	05700-004-84-98
19	2	Door Stop, Front	05700-004-85-74
20	4	Locknut, 1/4-20 Hex with Nylon Insert	05310-374-01-00
21	2	Door Stop, Rear	05700-004-86-86
22	2	Door Guide	05330-600-01-00

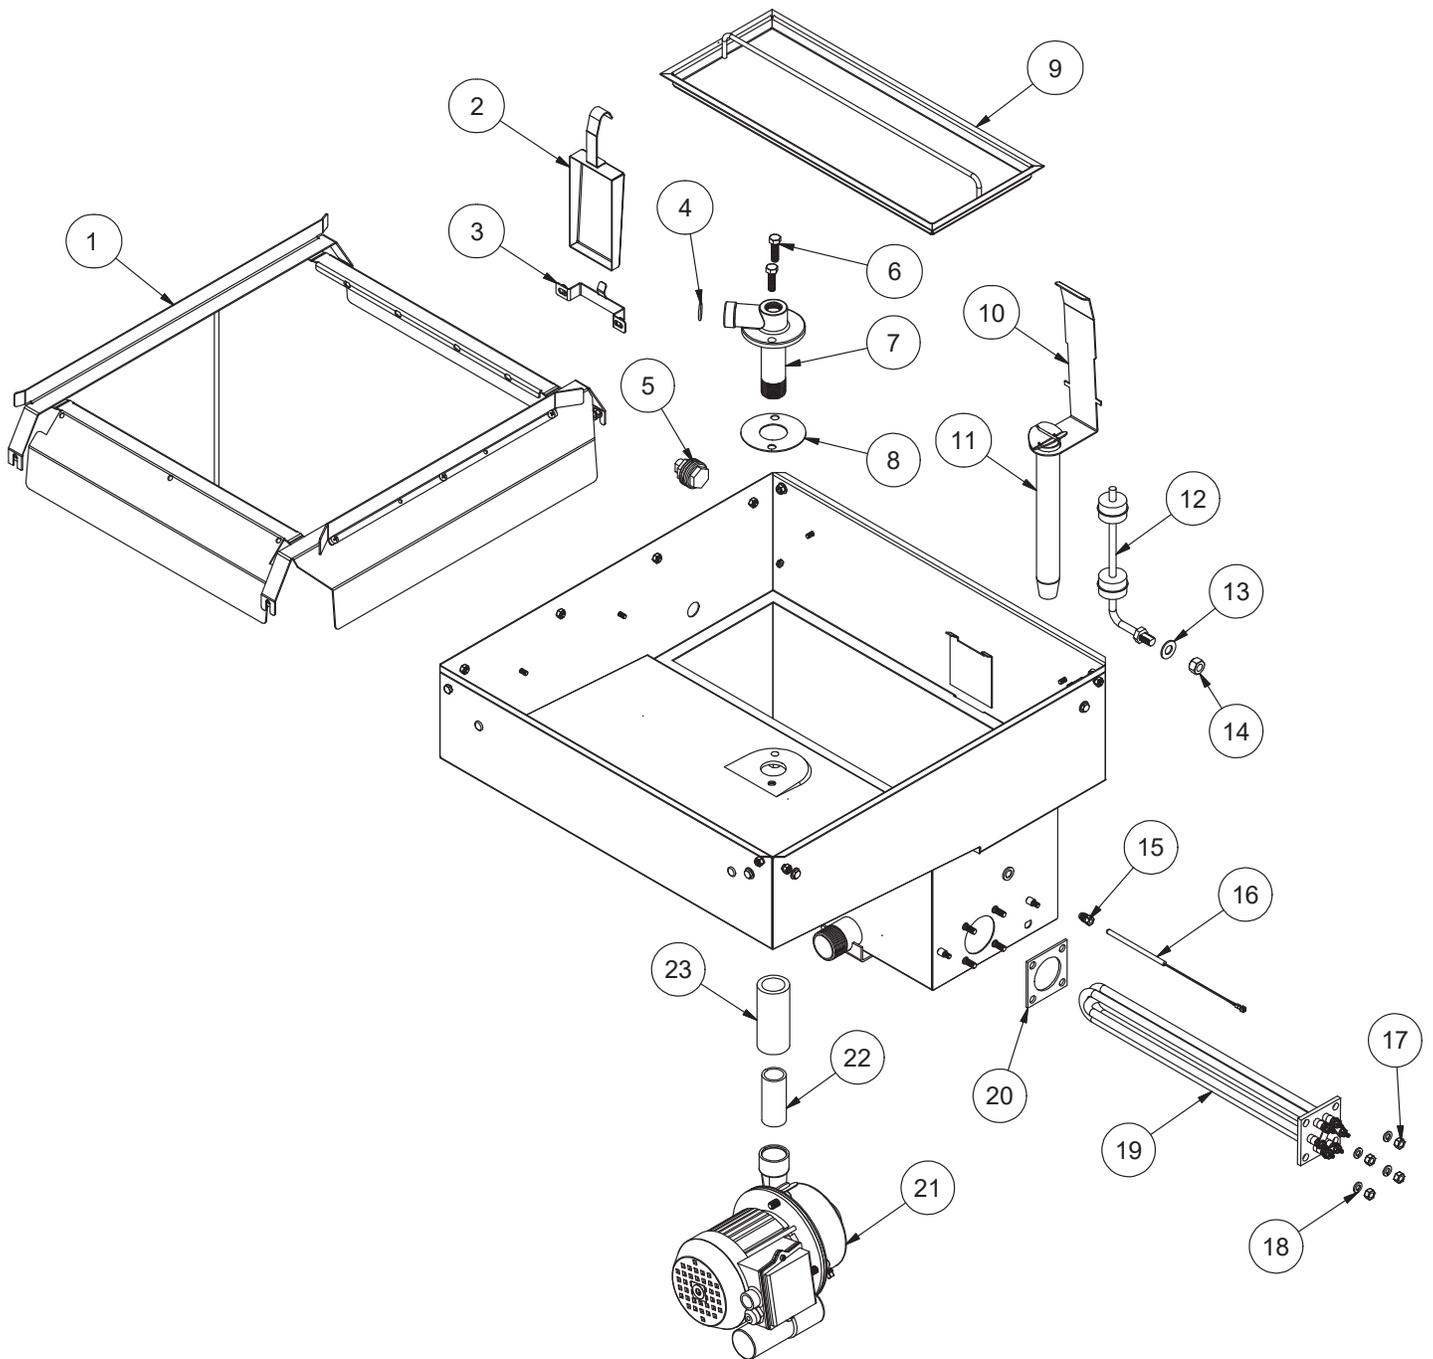

ITEM	QTY	DESCRIPTION	PART NUMBER
1	1	Track Assembly	05700-002-01-00
2	1	Sump Strainer	05700-001-22-23
3	1	Bracket, Sump Strainer	05700-001-22-24
4	1	O-ring	05330-002-60-69
5	1	Bulk Head Plug	04730-609-05-00
6	2	Bolt, Hex 3/8-16 x 1 1/4" Long	05305-276-10-00
7	1	Lower Wash Manifold	05700-031-46-00
8	1	Gasket	05700-111-35-03
9	1	Scrap Screen	05700-003-07-76
10	1	Standpipe Lift Standpipe Lift Support (Not Shown)	05700-002-91-54 05700-002-91-55
11	1	Standpipe	05700-001-25-69
12	1	Switch, Dual Float	06680-121-70-71
13	1	Washer, Flat, 1/2"	05311-011-71-93
14	1	Nut, 1/2-13	05310-011-72-58
15	1	Fitting, 1/4"	05310-924-02-05
16	1	Probe, Thermistor 4"	06685-004-17-26
17	1	Nut, Hex, 5/16-18	05310-275-01-00
18	1	Lockwasher, 5/16", Split	05311-275-01-00
19	1	Heater	See Heaters page.
20	1	Wash Heater Gasket	05330-011-47-79
21	1	Wash Motor	See Motors page.
22	1	Nipple	05700-021-34-84
23	1	Discharge Hose	05700-011-88-24

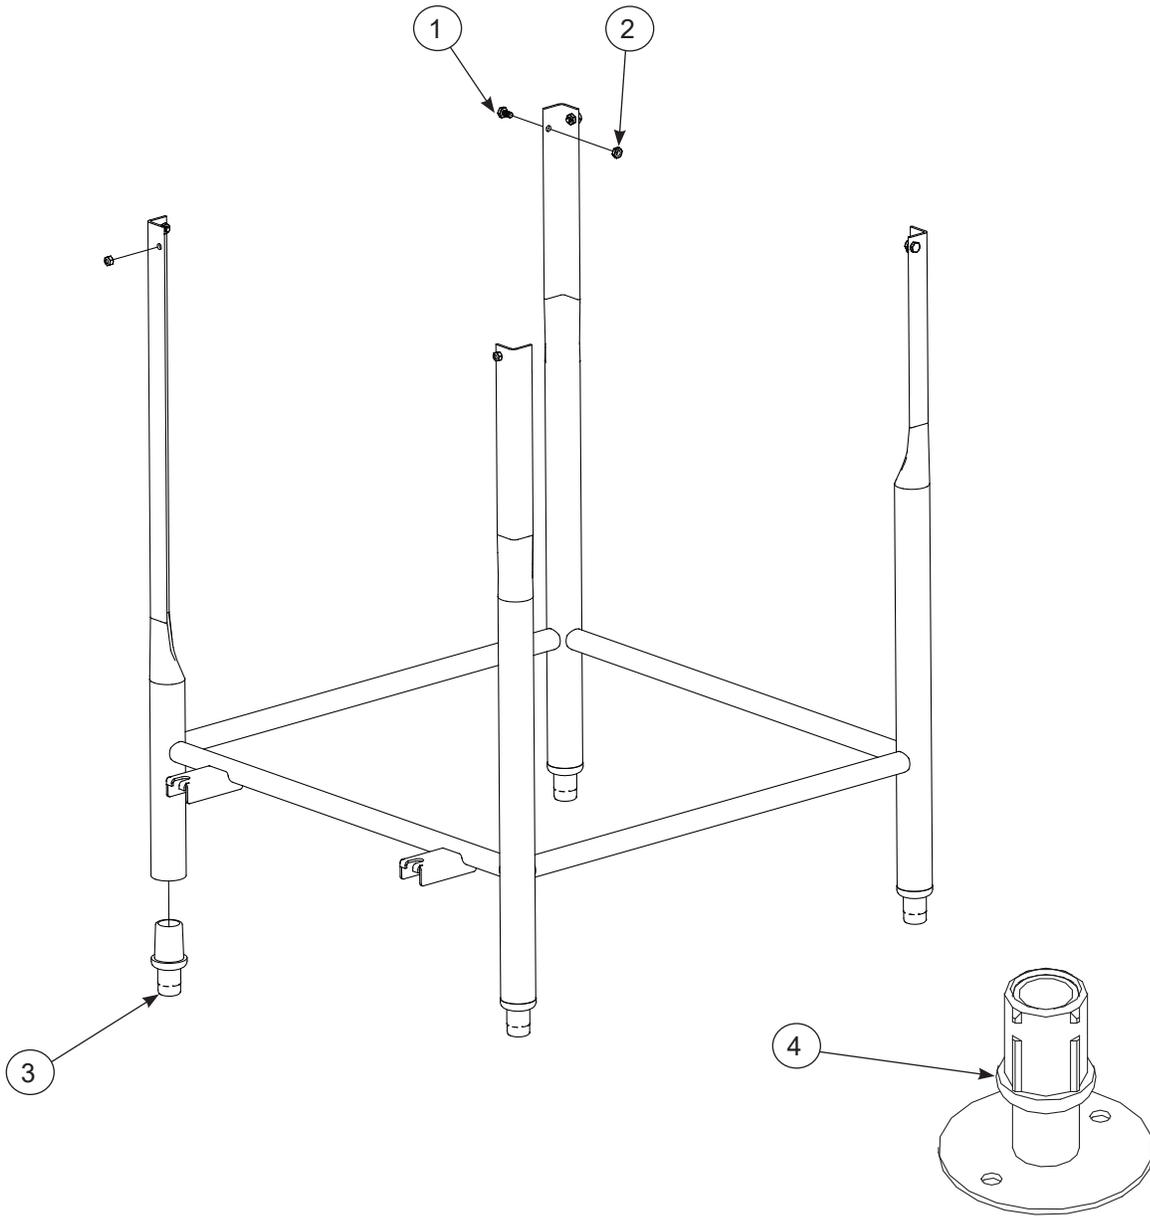


ITEM	QTY	DESCRIPTION	PART NUMBER
1	4	Bolt, 1/4-20 x 1/2"	05305-274-02-00
2	4	Locknut, 1/4-20 Hex with Nylon Insert	05310-374-02-00
3	4	Bullet Foot	05340-108-01-03
4	4	Flanged Bullet Foot (Optional)	05340-002-34-86

## Complete Assemblies

208-230 V, 14 kW 70° Rise - 05700-004-43-33


460 V, 14 kW 70° Rise - 05700-004-53-22

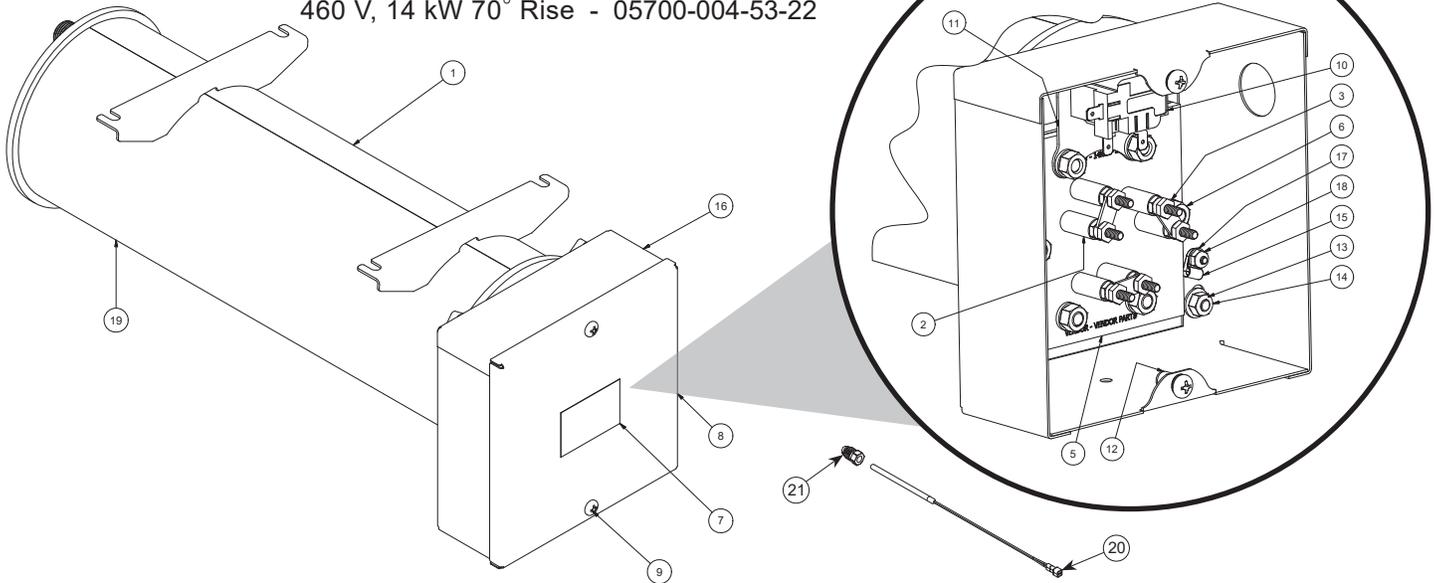

ITEM	QTY	DESCRIPTION	PART NUMBER
1	1	Tank, Rinse	05700-004-50-86
2	1	Heater, Rinse	See Heaters page.
3	6	Lockwasher, Split 5/16"	05311-275-01-00
4	1	Fitting, 1/4", Brass Nut/Sleeve	05310-924-02-05
5	1	Gasket, Rinse Heater	05330-200-02-70
6	6	Nut, Hex 5/16-18	05310-275-01-00
7	1	Decal, Warning-Disconnect Power	09905-100-75-93
8	1	Cover, Heater	05700-004-51-34
9	2	Screw	05305-004-27-82
10	1	Thermostat, High-limit	05930-004-33-12
11	1	Bracket, High-limit Thermostat	05700-004-36-84
12	2	Nut, 1/4-20	05310-004-23-96
13	4	Washer, 1/4-20	05311-174-01-00
14	4	Locknut, 1/4-20 Hex with Nylon Insert	05310-374-01-00
15	1	Clamp, Wire 1/8", P-clip	05975-601-10-15
16	1	Cover Door, New Rinse Tank	05700-004-52-21
17	1	Washer, Flat	05311-173-02-00
18	1	Locknut, Hex 8-32	05310-272-02-00
19	1	Plug, 1/4", Brass (Not Shown)	04730-209-01-00
20	1	Probe, Thermistor 4"	06685-004-17-26
21	1	Fitting, 1/4"	05310-924-02-05

**Complete Assemblies**

(See next page for parts.)

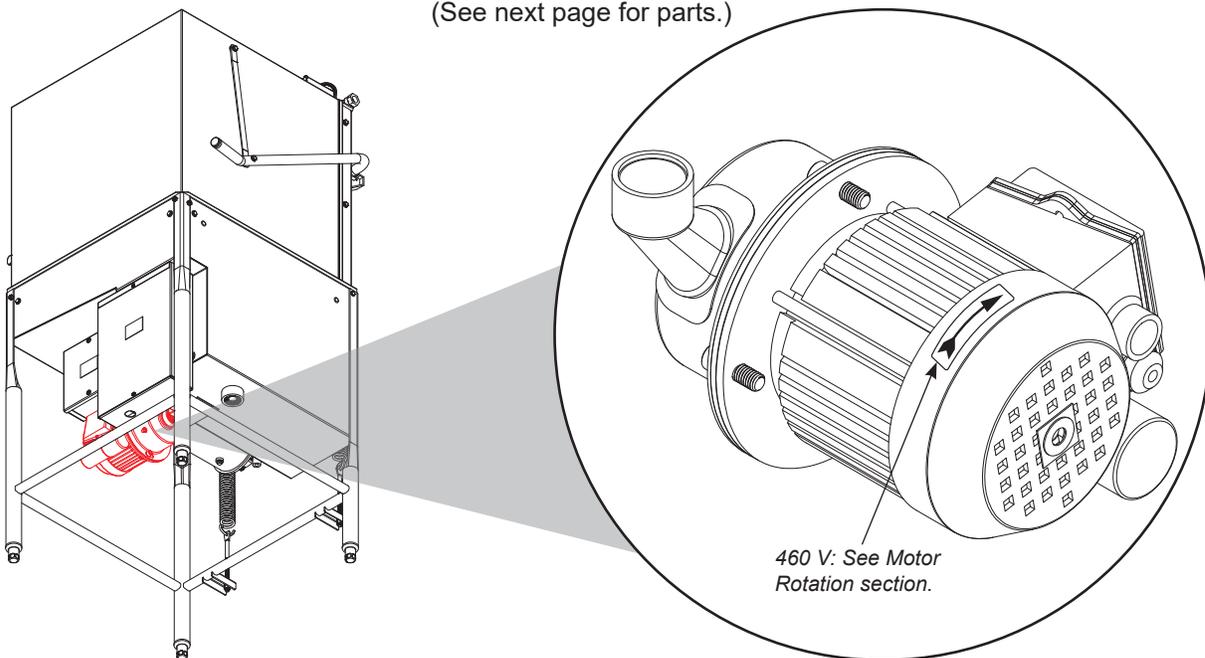

The models covered in this manual come supplied with various wash motor assemblies (a wash motor assembly includes the wash motor and the pump end), depending on the characteristics of the machine. To ensure you order the correct wash motor assembly for the model you are servicing, please refer to the following table:

MODEL	VOLTS	Hz	PHASE	WASH MOTOR ASSEMBLY
All	208	60	1	06105-004-24-80 <sup>1</sup>
All	208	60	3	06105-004-24-80 <sup>1</sup>
All	230	60	1	06105-004-24-80 <sup>1</sup>
All	230	60	3	06105-004-24-80 <sup>1</sup>
All	460	60	3	06105-121-64-21 <sup>2</sup>

<sup>1</sup>Use P/N 06105-004-32-04 to order the motor only.


<sup>2</sup>Use P/N 06105-002-62-71 to order the motor only.

**NOTICE**

When servicing a wash motor, it is important to refer to the wiring schematic found on the motor to ensure the motor is wired correctly. Different manufacturers of motors might not use the same wire color codes and your new motor might not connect using the same wires. Always refer to the wiring diagrams on the motor you are installing. If the motor you are installing has had the schematic removed, contact the manufacturer immediately for technical support.

## Parts

(See previous page for complete assemblies.)

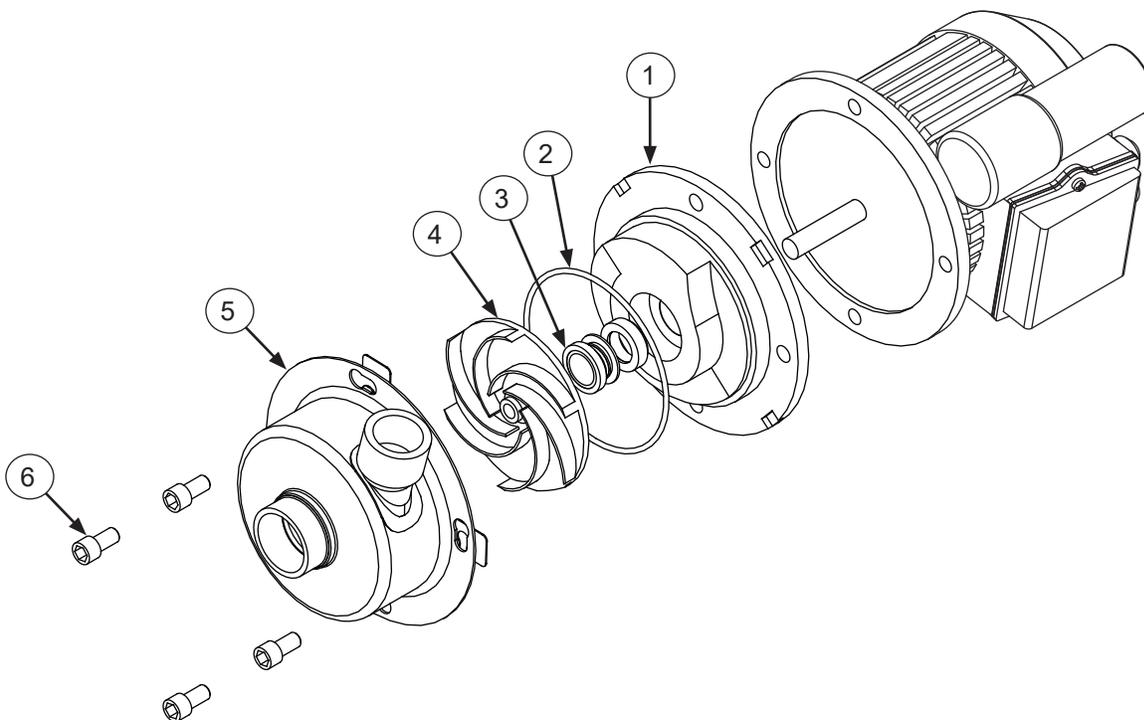

The models covered in this manual come supplied with various wash motors (see previous page), depending on the characteristics of the machine. To ensure you order the correct parts for the model you are servicing, please refer to the following table:

ITEM	QTY	DESCRIPTION	PART NUMBER
1	1	Seal Plate, 208/230 V	05700-002-81-87
	1	Seal Plate, 460 V	05700-002-06-22
2	1	Case O-ring, 208/230 V	05330-002-81-83
	1	Case O-ring, 460 V	05330-002-87-02
3	1	Mechanical Seal, 208/230 V	05330-002-34-22
	1	Mechanical Seal, 460 V	05330-002-87-16
4	1	Impeller Assembly, 208/230 V	05700-002-81-86
	1	Impeller Assembly, 460 V	05700-002-06-19
5	1	Pump Casing 208/230 V	05700-002-85-01
	1	Pump Casing 460 V	05700-002-06-20
6	1	Case Capscrew, 208/230 V	05305-002-81-88


Volts	Hz	Phase	Wash Heater	Rinse Heater (14 kW)
208	50	1	04540-121-47-39	04540-121-63-38
208	50	3	04540-121-47-39	04540-121-63-38
208	60	1	04540-121-47-39	04540-121-63-38
208	60	3	04540-121-47-39	04540-121-63-38
230	50	1	04540-121-47-39	04540-121-63-38
230	50	3	04540-121-47-39	04540-121-63-38
230	60	1	04540-121-47-39	04540-121-63-38
230	60	3	04540-121-47-39	04540-121-63-38
380	50	3	04540-002-44-31	04540-121-63-38
415	50	3	04540-002-43-09	N/A
440	50	3	04540-121-65-99	04540-121-63-39
460	60	3	04540-121-65-99	04540-121-63-39

#### Heater Phase Conversion Kit


06401-004-00-22

Complete Plumbing Assembly  
05700-004-54-52

Top View

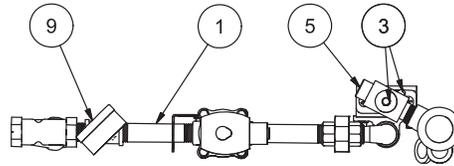

Back View

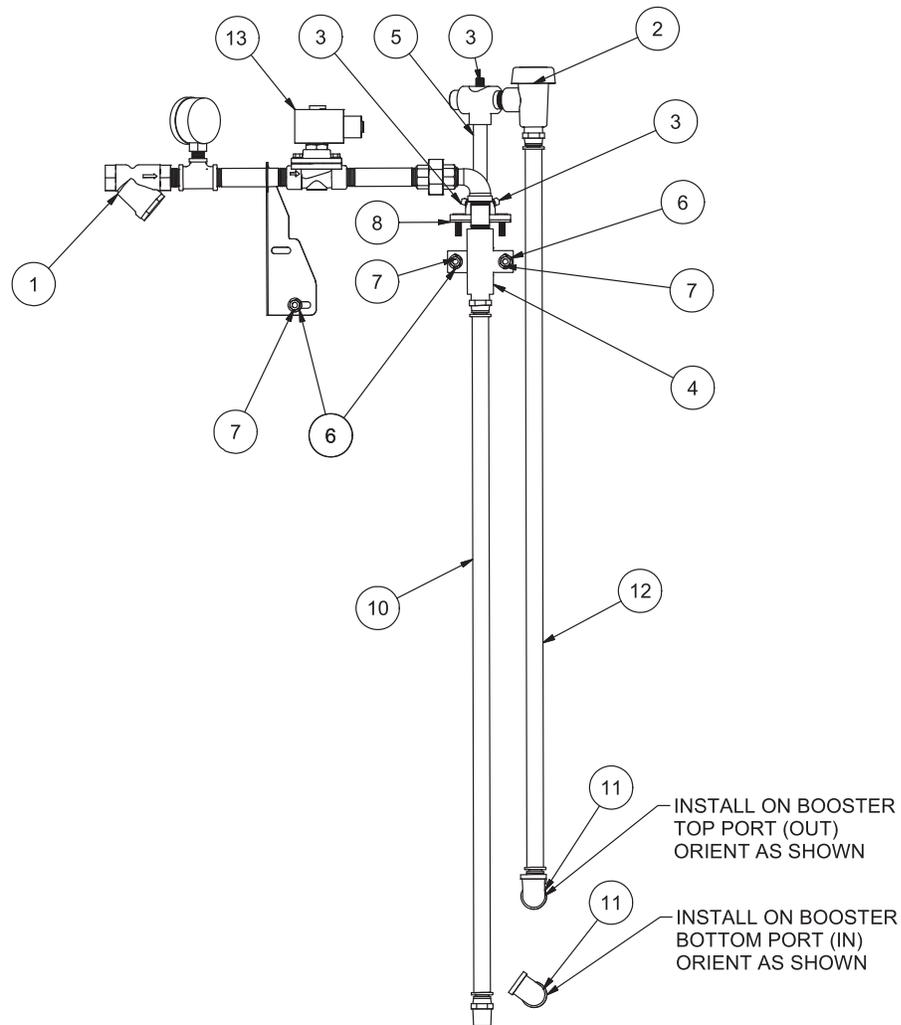


**NOTICE**

When servicing plumbing components, take care not to damage the threads of each individual item. Damaged threads can cause leaks and loss of pressure, which could adversely affect the performance of the machine. It is strongly recommended that thread tape—used in conservative amounts—be applied to threads when joining components together. Do not use thread-sealing compounds, sometimes referred to as "pipe dope." Compounds can be ejected from the threads during the tightening process and become lodged in key components, rendering them useless, including solenoid valves and pressure gauge ball valves.

ITEM	QTY	DESCRIPTION	PART NUMBER
	1	Plumbing, Complete Assembly	05700-004-54-52
1	1	Plumbing, Inlet	05700-004-47-98
2	1	Vacuum Breaker, 1/2" Brass	04820-003-06-13
3	3	Plug, Rinse Injector, 1/8" Brass	04730-209-07-37
4	1	Casting, 1/2" Flanged Coupling	05700-004-47-97
5	1 1	Rinse Injector Gasket, Rinse Injector (Not Shown)	05700-002-56-75 05330-111-42-81
6	3	Washer, 1/4-20 Hex with Nylon Insert	05311-174-01-00
7	3	Locknut, 1/4-20 Hex with Nylon Insert	05310-374-01-00
8	1	Gasket, Rinse Manifold	05330-003-75-91
9	1	Decal, 10 PSI	09905-004-50-73
10	1	Hose, 1/2" x 31" Blue	05700-004-54-56
11	2	Elbow, 1/2" 90-degree Brass	04730-011-42-96
12	1	Hose, 1/2" x 33" Red	05700-004-51-62
13	1	Solenoid Valve, 1/2"	04810-003-71-56

**SHOCK ABSORBER (WATER ARRESTOR) OPTION**

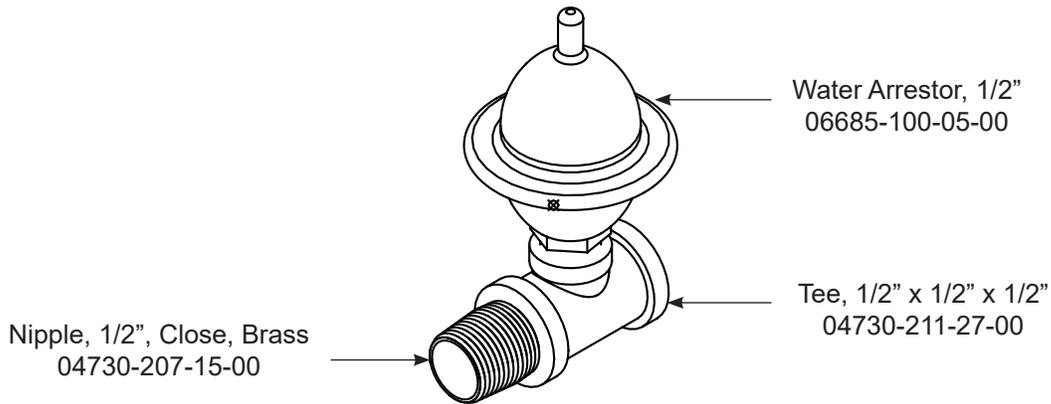


**WATER TREATMENT OPTION**


Scaltrol System  
04730-003-05-76

Replacement Cartridge  
(inspect at least every 6 months)  
RSC-100


**PRESSURE REGULATING VALVE OPTION**

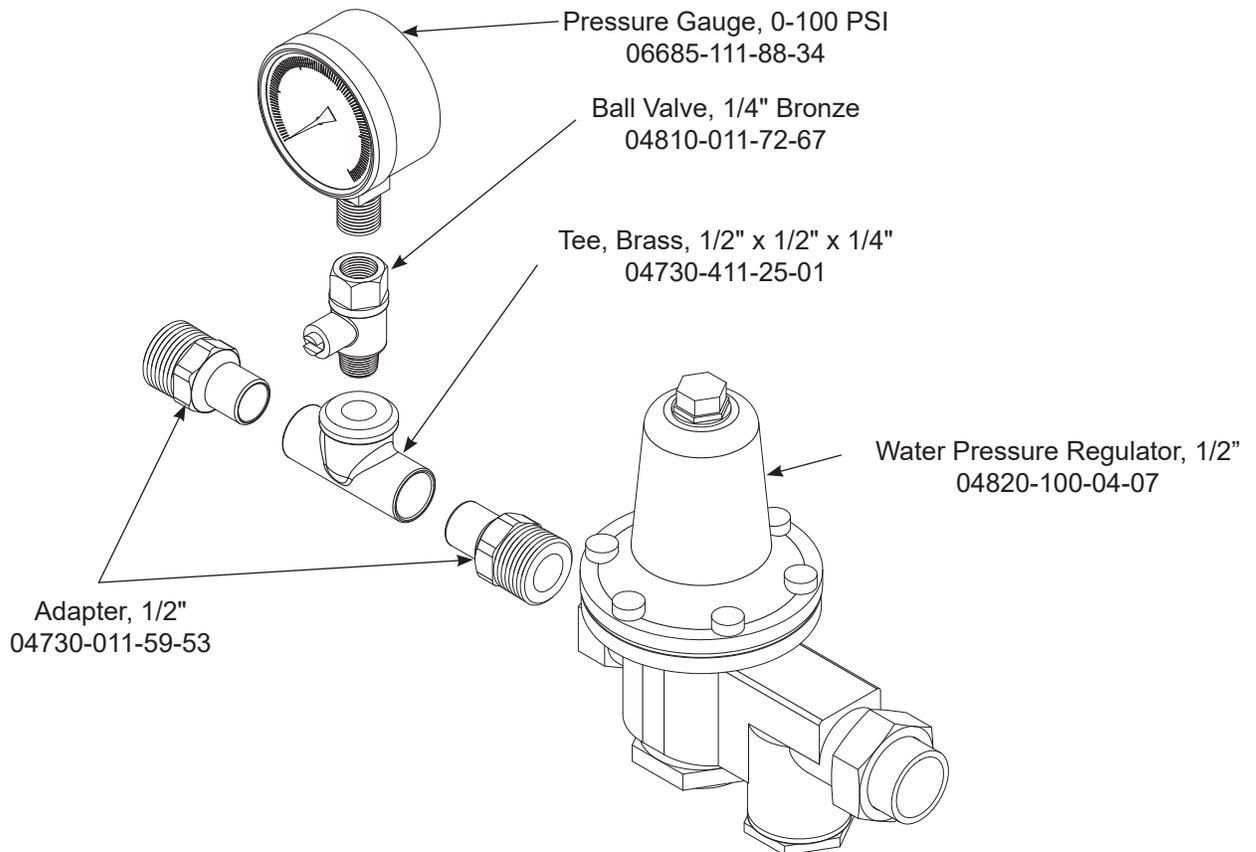

**FINAL RINSE ARMS & MANIFOLD**

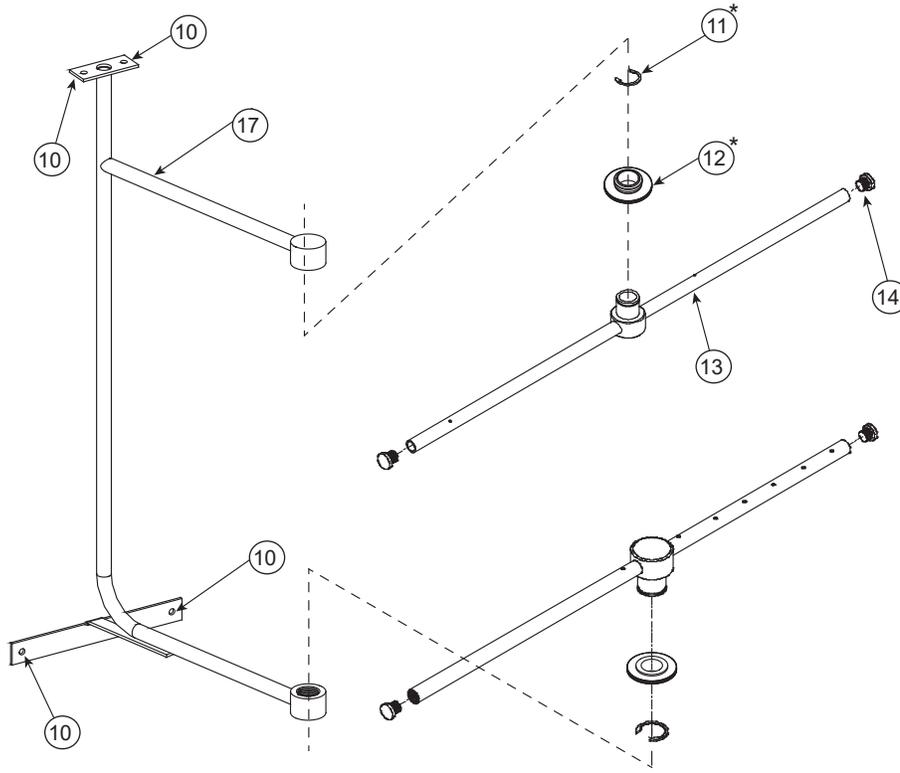


**WASH ARMS & MANIFOLD**

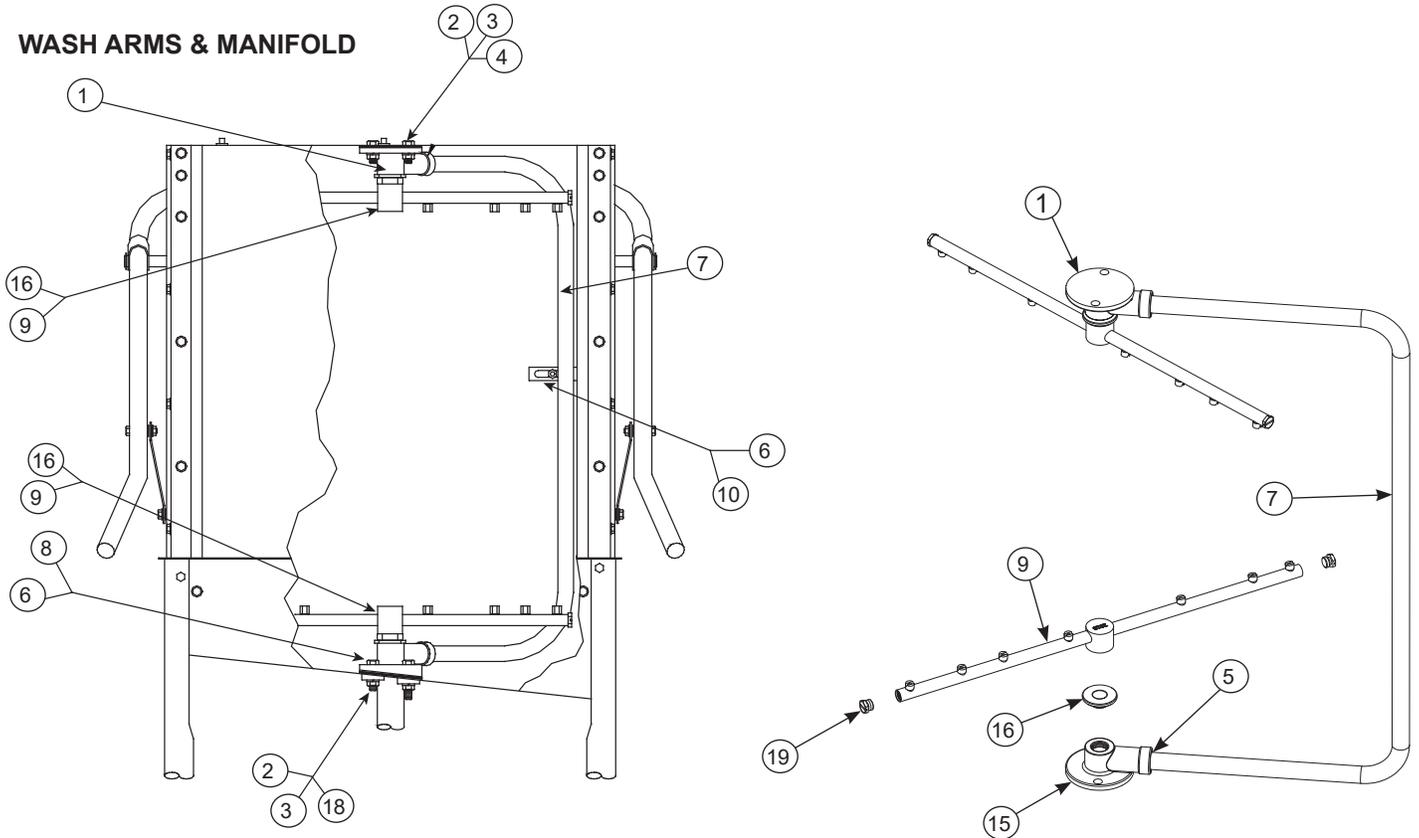



ITEM	QTY	DESCRIPTION	PART NUMBER
1	1	Upper Manifold	05700-031-34-82
2	4	Nut, 3/8-16 Hex	05310-276-01-00
3	4	Lockwasher, 3/8"	05311-276-01-00
4	2	Bolt, Hex 3/8-16 x 7/8"	05306-011-36-95
5	2	O-ring	05330-111-35-15
6	1	Positioning Bracket, Manifold Tube	05700-011-34-63
7	1	Tube, Wash Manifold	05700-131-15-07
8	2	Gasket, Manifold	05700-111-35-03
9	1	Wash Arm	05700-004-13-13
10	5	Locknut, 1/4-20 Hex with Nylon Insert	05310-374-01-00
11*	2	Clip, Retaining, Rinse Head Bushing	05340-112-01-11
12*	2	Bearing Assembly, Rinse Arm	05700-004-54-71
13	2	Rinse Arm	05700-003-58-94
14	4	Rinse Arm End-cap	04730-111-60-41
15	1	Lower Wash Manifold	05700-031-46-00
16	2	Bearing Assembly	05700-021-35-97
17	1	Rinse Manifold Assembly	05700-021-47-61
18	2	Bolt, Hex 3/8-16 x 1 1/4"	05305-276-10-00
19	4	Wash Arm End-cap	05700-003-31-59

\*Rinse Arm Bearing Kit  
(Includes items 11 and 12)  
06401-004-57-50


# 460 V MACHINE TRANSFORMER MOUNTING BOX

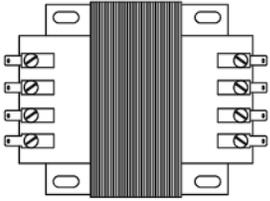


460 V Transformer  
05950-111-65-93

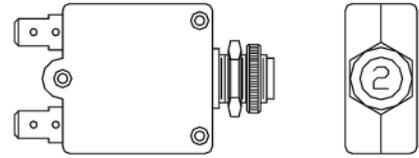

2 A Circuit Breaker  
05925-111-64-18

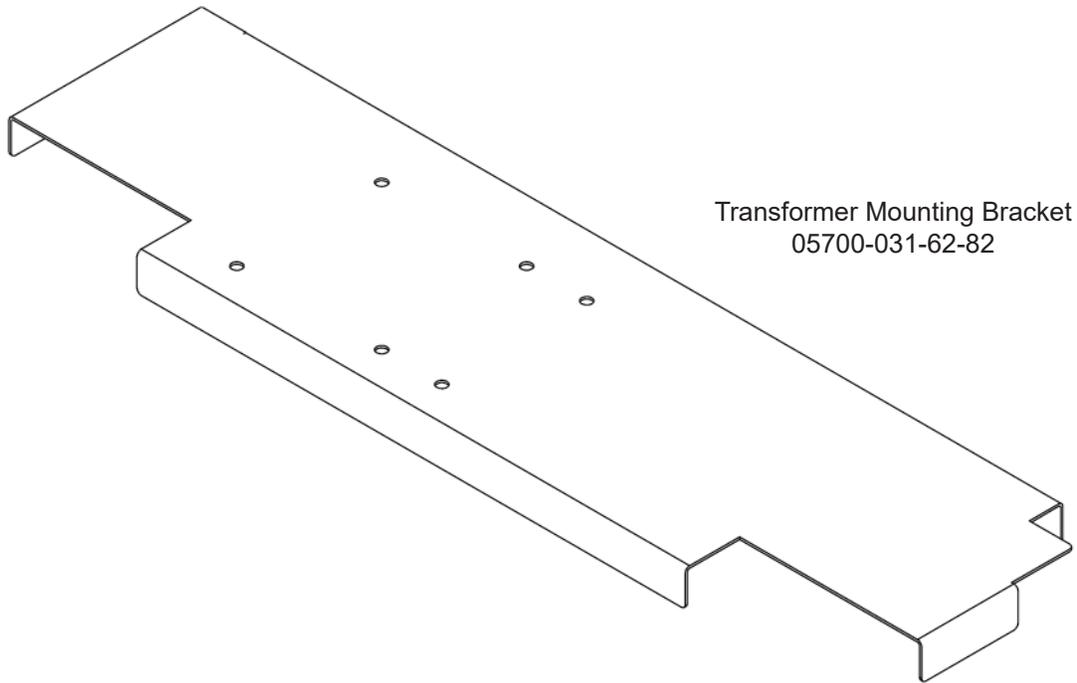

Transformer Mounting Bracket  
05700-031-62-82


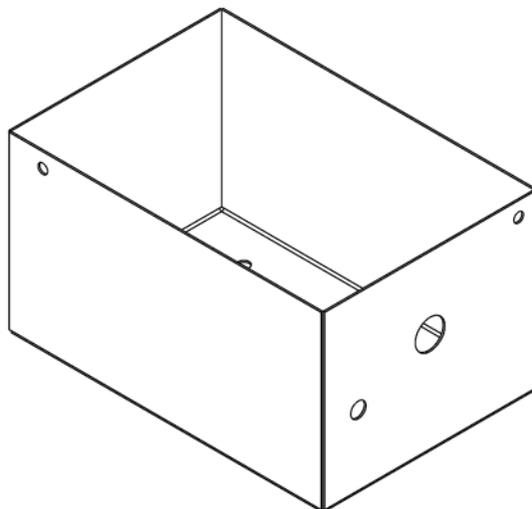


Transformer Mounting Box  
05700-002-10-01

Transformer Mounting Box Top  
(Not Shown)  
05700-000-78-53

Call 1-880-800-5672 to order kits for NXP-HTD and use the part numbers below:

DESCRIPTION	PART NUMBER
Door Magnet Cover Kit	06401-004-07-73
Drain Water Tempering Kit	06401-004-85-80
Exhaust Fan Contactor Kit	05700-004-35-35
False Panel Kit	05700-002-75-59
Phase Conversion Kit	06401-004-00-22

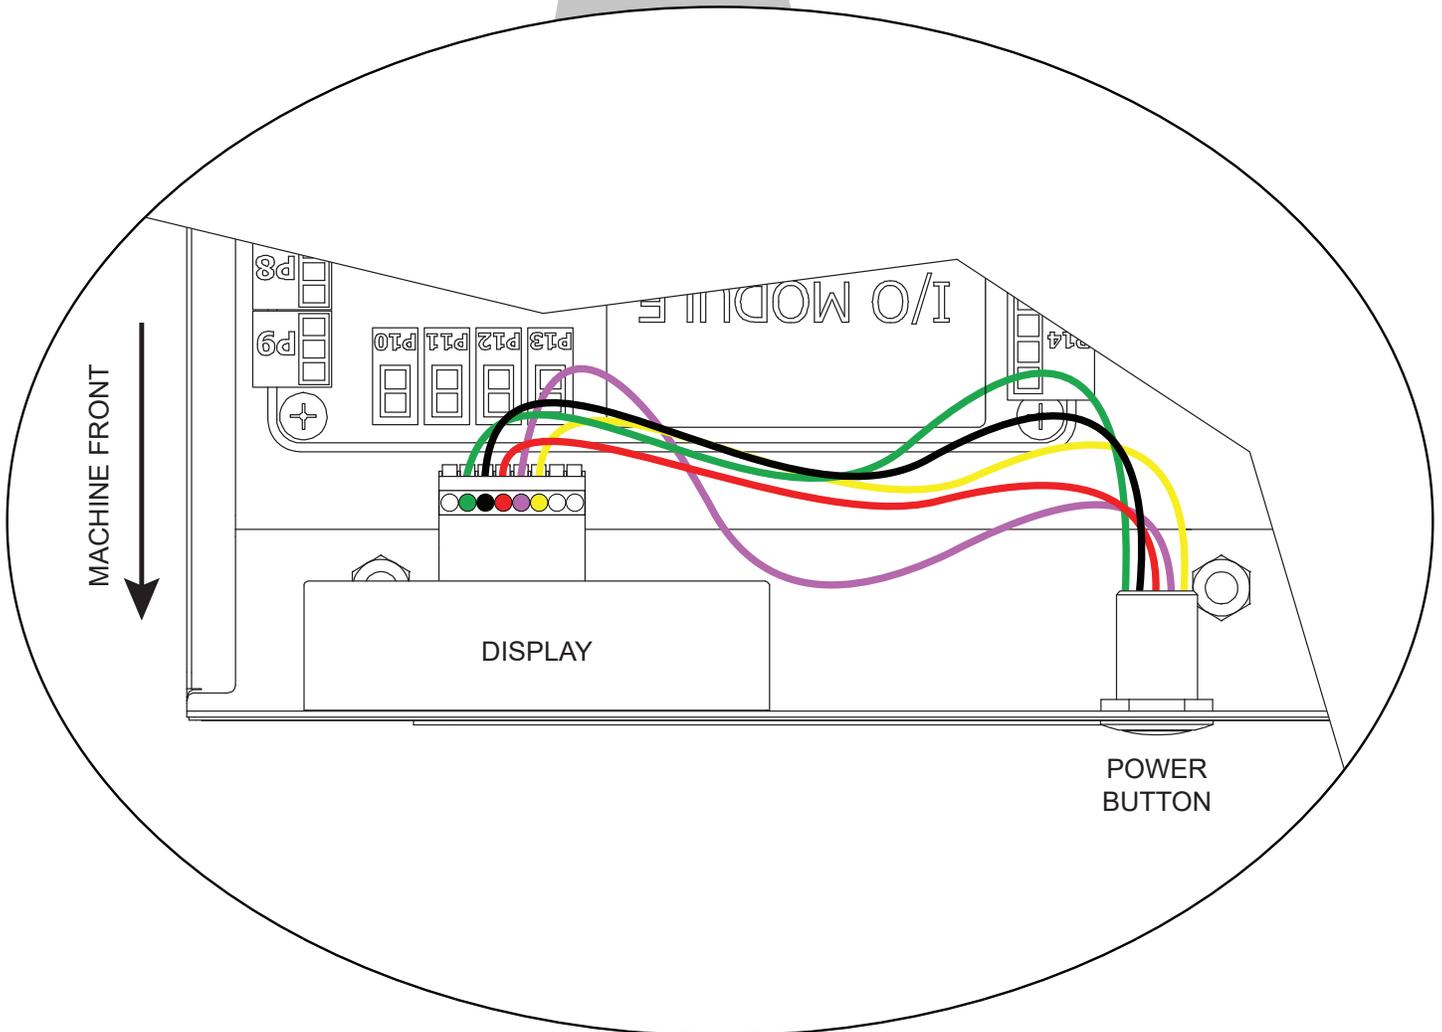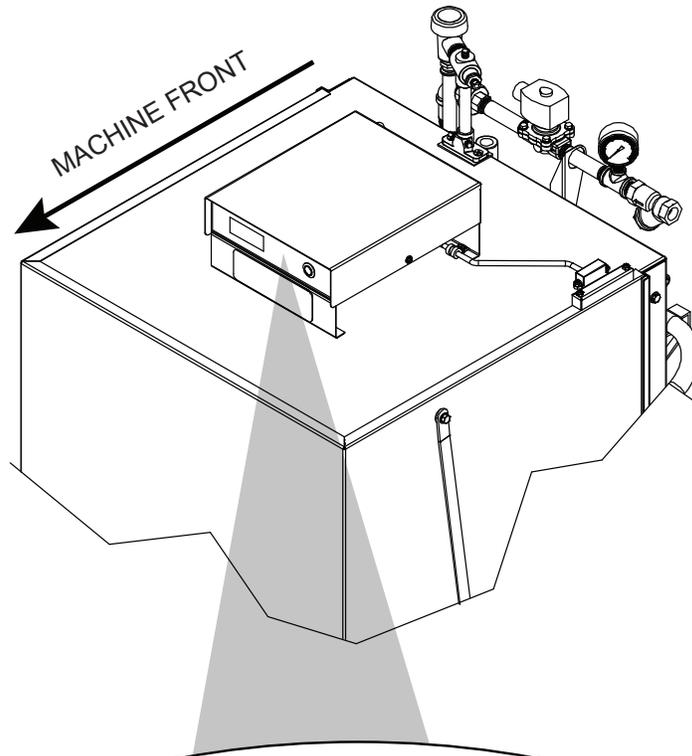





Jackson WWS, Inc. • 6209 N. US Hwy 25E • Gray, KY 40734 USA  
1.888.800.5672 • [www.jacksonwws.com](http://www.jacksonwws.com)