DISHSTAR SCHEMATIC
HT-E/HT-E-SEER

208/240 VOLTS, 50/60 Hz, 1-PHASE

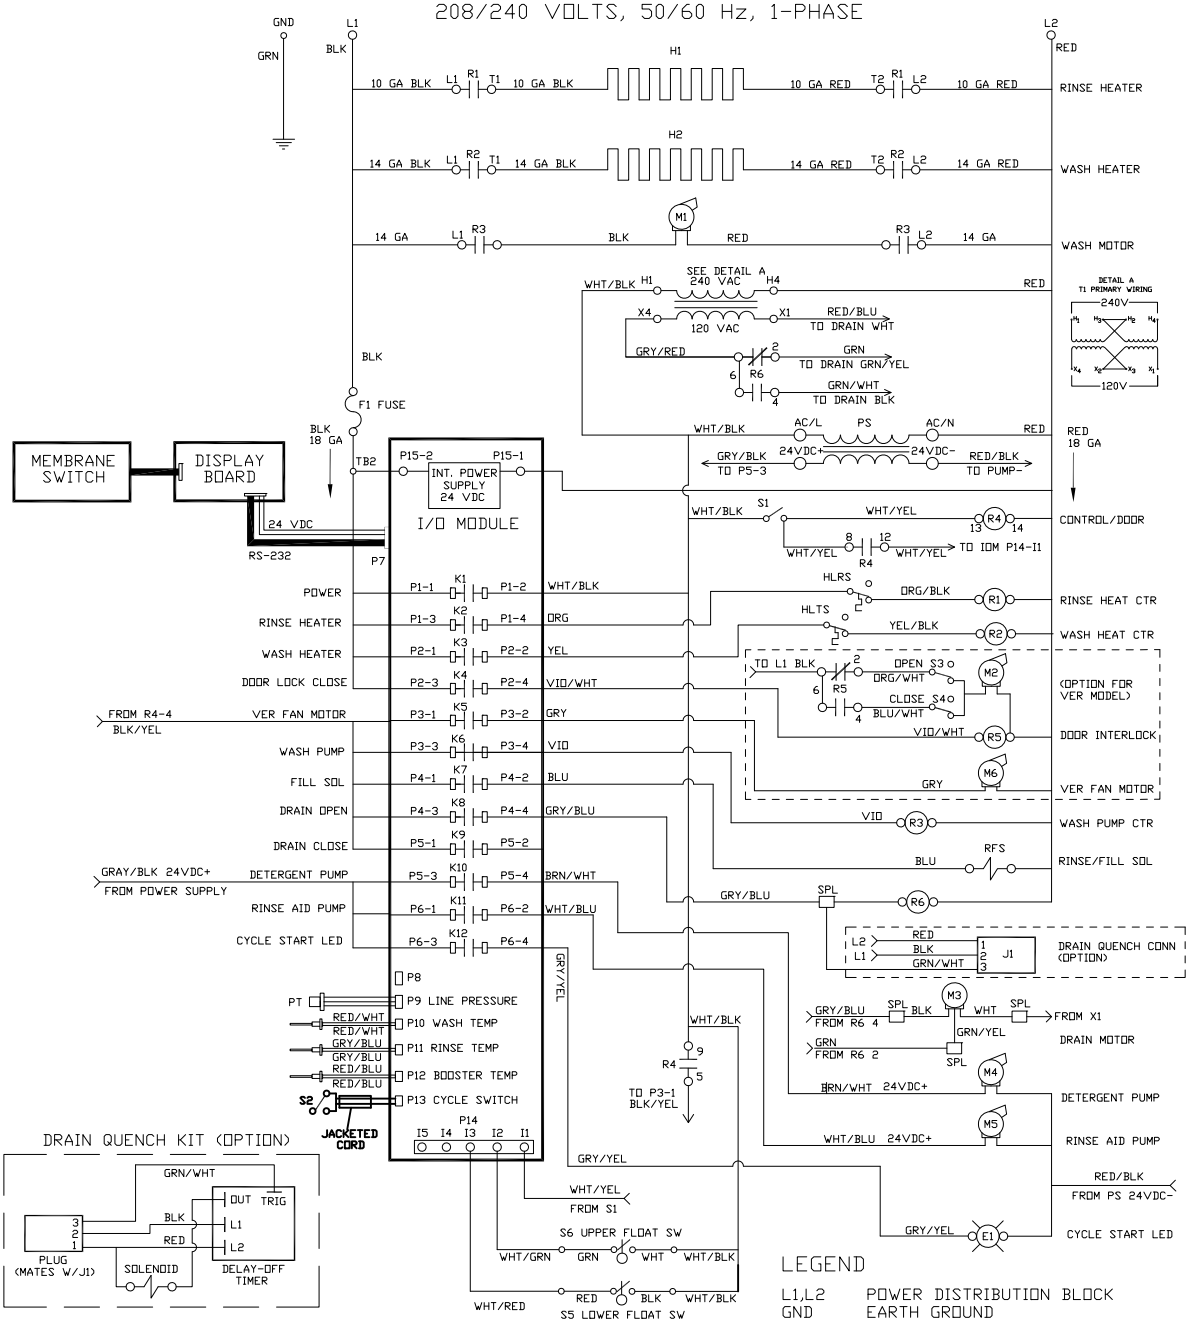

LEGEND

L1,L2	POWER DISTRIBUTION BLOCK
GND	EARTH GROUND
E1	CYCLE START LED
H1	HEATER, RINSE
H2	HEATER, WASH
M1	MOTOR, WASH PUMP
M2	MOTOR, DOOR INTERLOCK(OPTION)
M3	MOTOR, DRAIN
M4	MOTOR, DETERGENT PUMP
M5	MOTOR, RINSE AID PUMP
M6	MOTOR, VER FAN (OPTION)
R1	CONTACTOR, RINSE HEATER
R2	CONTACTOR, WASH HEATER
R3	CONTACTOR, WASH PUMP
R4	RELAY, CONTROL
R5	RELAY, DOOR INTERLOCK (OPTION)
R6	DRAIN RELAY
F1	FUSE- L1 CONTROL
S1	SWITCH, DOOR
S2	SWITCH, CYCLE START
S3	SWITCH, DOOR LOCK OPEN (OPTION)
S4	SWITCH, DOOR LOCK CLOSE (OPTION)
S5	SWITCH, FLOAT HEATER CONTROL
S6	SWITCH, FLOAT FILL/DRAIN CONTROL
HLTS	HIGH-LIMIT T-STAT, WASH HEATER
HLRS	HIGH-LIMIT T-STAT, RINSE HEATER
RFS	RINSE/FILL SOLENOID
PT	PRESSURE TRANSDUCER
PS	POWER SUPPLY 24VDC
J1	CONNECTOR, DRAIN QUENCH (OPTION)
SPL	SPLICE

Connection Diagram for IO Module

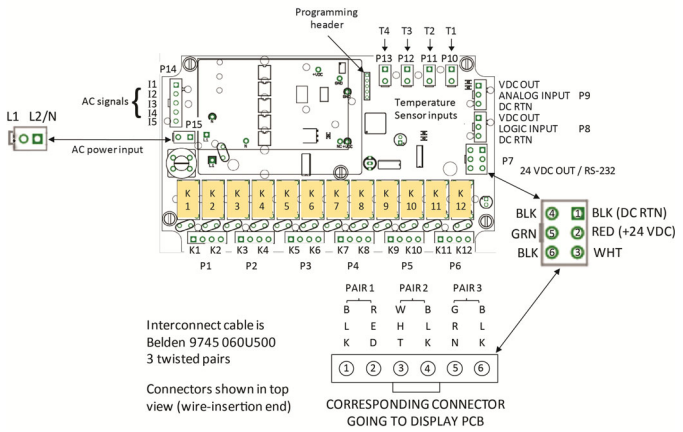

09905-005-19-08-C